

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 2155 (1982): Cold Forged Solid Steel Rivets for Hot Closing (6 to 16 mm Diameter) [PGD 31: Bolts, Nuts and Fasteners Accessories]

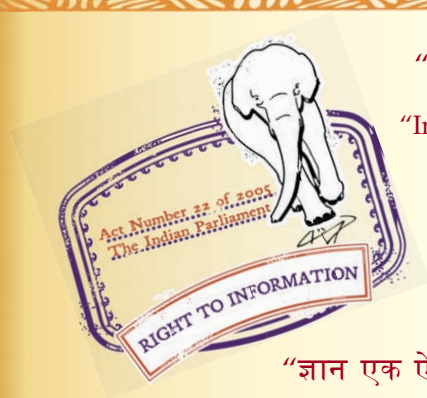

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



*Indian Standard***SPECIFICATION FOR
COLD FORGED SOLID STEEL RIVETS FOR HOT CLOSING
(6 TO 16 mm DIAMETER)***(First Revision)*

1. Scope — Covers the requirements of cold forged solid steel rivets for hot closing in the diameter range 6 to 16 mm, intended for general engineering purposes.

2. Material

2.1 The rivets shall be manufactured from steel conforming to IS : 7557-1974 ' Specification for steel wire (up to 20 mm) for the manufacture of cold forged rivets '. They may also be manufactured from steel conforming to IS : 226-1975 ' Specification for structural steel (standard quality) (*fifth revision*) ' provided that the steel meets the dump test requirements given in IS : 1148-1973 ' Specification for hot rolled rivet bars (up to 40 mm diameter) for structural purposes (*second revision*) '.

3. Dimensions

3.1 Dimensions of rivets shall be as shown in Tables 1 to 3.

3.2 Where rivets with snap head and countersunk head are made with a flat edge, they shall conform to the values given in IS : 10102-1982 ' Technical supply conditions for rivets '.

3.3 The preferred nominal diameter-length combinations are given in Table 4.

4. Acceptance Tests

4.1 General — The sampling and acceptance criteria of the rivets shall be in accordance with IS : 10102-1982.

4.2 Test for Material — The material used for the manufacture of rivets shall be in accordance with the stipulations of the relevant material specifications at 2.1.

4.3 Shear Test — When tested by the method prescribed in IS : 10102-1982 the rivets shall satisfy a minimum shear strength of 260 MPa.

4.4 Head Soundness Test — When tested by the method prescribed in IS : 10102-1982 the rivets, at room temperature, shall withstand the test without exhibiting any sign of marking at the fillet between the head and the shank.

5. Designation

5.1 A snap head rivet of 6 mm diameter having a length of 30 mm shall be designated as:

Snap Head Rivet 6 × 30 IS : 2155

6. General Requirements

6.1 The general requirements for the supply of rivets and their workmanship shall be in accordance with IS : 10102-1982.

6.2 Limits of surface cracks on rivets shall be in accordance with IS : 10102-1982.

7. Marking

7.1 All rivets shall be marked with the manufacturer's trade-mark on the head in raised figure.

7.2 ISI Certification Mark — The bags containing the rivets may also be marked with the ISI Certification Mark.

8. Mode of Delivery — Rivets shall be packed and delivered in accordance with IS : 10102-1982.


Adopted 21 May 1982

© January 1983, BIS

Gr 3

TABLE 1 DIMENSIONS FOR SNAP HEAD RIVETS
(Clause 3.1)

All dimensions in millimetres.

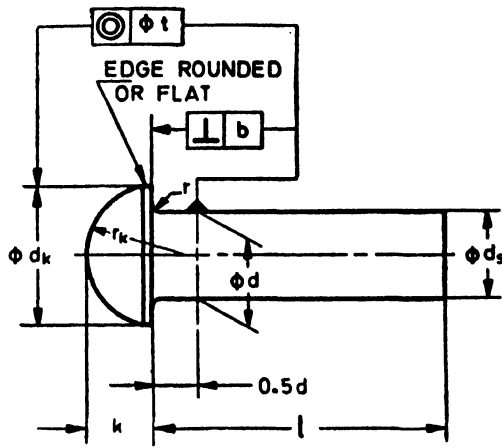

$t = 2tT14$ for $d \leq 8$
 $t = 2tT15$ for $d > 8$

Nom	6	8	10	12	(14)	16
d Max	6.15	8.15	10.3	12.3	14.3	16.3
Min	5.85	5.85	9.7	11.7	13.7	15.7
ds Min	5.82	7.76	9.4	11.3	13.2	15.2
Nom	9.6	12.8	16.0	19.2	22.4	25.6
dk Max	9.9	13.1	16.36	19.60	22.8	26.1
Min	9.3	12.5	15.64	18.8	22.0	25.1
Nom	4.2	5.6	7.0	8.4	9.8	11.2
k Max	4.44	5.84	7.29	8.69	10.09	11.55
Min	3.96	5.36	6.71	8.11	9.51	10.85
r Max	0.3	0.4	0.5	0.6	0.7	0.8
rk M =	5.7	7.5	8	9.5	11	13

- Note 1** — The nominal diameter d in parenthesis is of second preference.
- Note 2** — For perpendicularity value b , see IS : 10102-1982.
- Note 3** — For permissible limits of shank diameter, see also IS : 10102-1982.
- Note 4** — Rivets shall be furnished with a definite radius under the head which shall not exceed the value, r given.
- Note 5** — The shape of head shall be forged into part of a sphere. Necessary flat land for trimming (see 3.1) on the head periphery is permissible.
- Note 6** — The value, r_k is given for snap design only and not intended for inspection purposes.

AMENDMENT NO. 1 DECEMBER 1984
TO
IS : 2155 - 1982 SPECIFICATION FOR COLD
FORGED SOLID STEEL RIVETS FOR HOT CLOSING
(6 TO 16 mm DIAMETER)
(First Revision)

Corrigenda

(Page 2, Table 1, third column, *d Min*) — Substitute '7.85' for '5.85'.

(Page 2, Table 1, first column) — Substitute ' $r_k \approx$ ' for ' $r_k M \approx$ '.

Alteration


(Page 5, Table 4, first column) — Substitute

$$\begin{array}{ll}
 + \frac{0.5}{0} \text{ for } l \leq 10 & + \frac{0.5}{0} \text{ For } d \leq 10 \\
 + \frac{1.0}{0} \text{ for } 10 < l \leq 20 & \text{for } l \text{ Tol } + \frac{1.0}{0} \text{ For } d > 10 \\
 + \frac{1.5}{0} \text{ for } l > 20 &
 \end{array}$$

TABLE 2 DIMENSIONS FOR FLAT COUNTERSUNK HEAD RIVETS

(Clause 3.1)

All dimensions in millimetres.

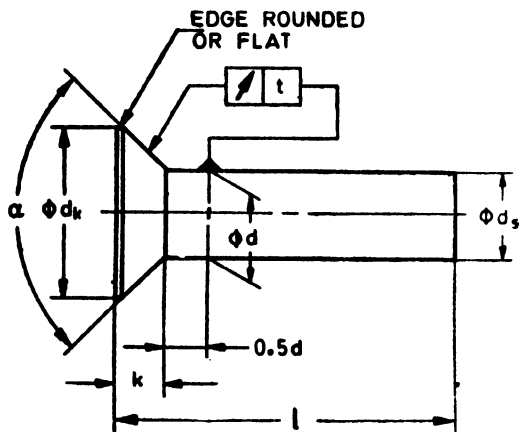

$l = 2lT14$ for $d \leq 8$
 $l = 2lT15$ for $d > 8$

Nom	6	8	10	12	(14)	16
d Max	6.15	8.15	10.3	12.8	14.3	16.3
Min	5.85	7.85	9.7	11.7	13.7	15.7
ds Min	5.82	7.76	9.4	11.3	13.2	15.2
Nom	12	16	20	24	21	24
dk Max	12	16	20	24	21	24
Min	11.3	15.3	19.16	23.16	20.16	23.16
k Ref	3.0	4.0	5.0	6.0	6.0	6.9
$\alpha + 5^\circ$ 0	90°				60°	


Note 1 — The nominal diameter, d in parenthesis is of second preference.

Note 2 — For permissible limits of shank diameter, see also IS : 10102-1982.

TABLE 3 DIMENSIONS FOR FLAT HEAD RIVETS

(Clause 3.1)

All dimensions in millimetres.

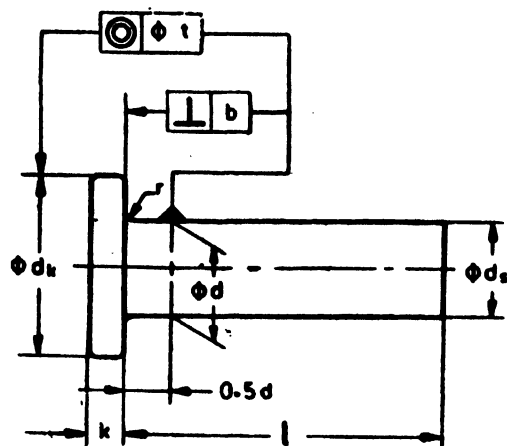

$t = 21T14$ for $d \leq 8$
 $t = 21T15$ for $d > 8$

Nom	6	8	10	12	(14)	16
d Max	6.15	8.15	10.3	12.3	14.3	16.3
Min	5.85	7.85	9.7	11.7	13.7	15.7
ds Min	5.82	7.76	9.4	11.3	13.2	15.2
Nom	12	16	20	24	28	32
dk Max	12.0	16.0	20	24	28	32
Min	11.3	15.3	19.16	23.16	27.16	31
Nom	1.5	2	2.5	3	3.5	4
k Max	1.9	2.5	3.0	3.6	4.1	4.6
Min	1.5	2	2.5	3	3.5	4
r Max	0.3	0.4	0.5	0.6	0.7	0.8

Note 1 — Nominal diameter, d in parenthesis is of second preference.

Note 2 — For permissible limits of shank diameter, see also IS : 10102-1982.

Note 3 — Perpendicularity tolerance value b , see IS : 10102-1982.Note 4 — Rivets shall be finished with a definite radius under the head and shall not exceed the value, r given.

TABLE 4 DIAMETER-LENGTH COMBINATIONS FOR COLD FORGED RIVETS FOR HOT CLOSING*(Clause 3.3)*

All dimensions in millimetres.

TOL $\begin{matrix} +0.5 \\ 0 \end{matrix}$ FOR $d \leq 10$ $\begin{matrix} +1.0 \\ 0 \end{matrix}$ FOR $d > 10$	NOMINAL DIAMETER d						
	6	8	10	12	(14)	16	
12							
14							
16							
18							
20							
22							
24							
26							
28							
30							
32							
35							
38							
40							
42							
45							
48							
50							
55							
60							
65							
70							
75							
80							
85							
90							
95							
100							
105							
110							
RIVET HOLE DIAMETER (FOR REFERENCE)	BASIC TOL H12	6.3	8.4	10.5	13	15	17

Note 1 — The nominal diameter in parenthesis is of second preference.**Note 2** — The preferred lengths are between the stepped lines.

EXPLANATORY NOTE

This standard was first published in 1962. The following major changes have been made in the present revision:

- Sizes 6 to 16 mm have been covered instead of 1.6 to 10 mm in the earlier edition. For sizes below 6 mm, IS: 2998-1982 'Cold forged steel rivets for cold closing (1 to 16 mm)' should be referred. While the manufacture is restricted to cold forging, the method of closing by 'hot closing' is indicated.
- Bend test and flattening test have been deleted and substituted by shear test and head soundness test.
- The method of representation of tolerances for form and position have been modified according to the latest practices.