

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 10292 (1988): Dimensional requirements for rubber sealing rings for C.I.D. joints in asbestos cement piping [MTD 6: Pig iron and Cast Iron]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



Indian Standard

**SPECIFICATION FOR
DIMENSIONAL REQUIREMENTS FOR RUBBER SEALING
RINGS FOR C.I.D. JOINTS IN ASBESTOS
CEMENT PIPING
(First Revision)**

1. Scope — Specifies the dimensional requirements for rubber sealing rings to be used with cast iron detachable joints conforming to IS : 8794 - 1978 'Specification for cast iron detachable joints for use with asbestos cement pressure pipes' for joining the asbestos cement pressure pipes conforming to IS : 1592-1980 'Specification for asbestos cement pressure pipes (second revision)'.

1.1 This standard covers the dimensions of rubber sealing rings having circular cross section only, up to 600 mm nominal diameter.

2. General — Unless otherwise stated requirements of rubber sealing rings as specified in IS : 5382-1985 'Rubber sealing rings for gas mains, water mains and sewers (first revision)' shall be complied with.

3. Type — The rubber rings shall conform to type 3 of IS : 5382-1985.

4. Dimensions and Tolerances

4.1 The inner diameters and cross sectional diameter of rubber rings for various sizes and classes of C.I.D. joints shall be in accordance with Table 1.

4.2 Tolerances — A tolerance of ± 0.5 mm shall be allowed on the cross sectional dia ' ϕ X' and ± 1 percent on inner dia ' ϕ Y' specified in Table 1.

5. Sampling — For the purpose of ascertaining conformity to this standard the scale of sampling and criteria for conformity shall be as prescribed in Appendix D of IS : 5382-1985.

6. Packing — The material shall be packed as agreed to between the purchaser and the manufacturer so as to protect it from undue exposure of light and heat and mechanical damages during transit and storage.

7. Marking — Wherever practicable and unless specified otherwise, each ring or packing or both shall be marked indelibly at a suitable position with the following information:

- a) the manufacturer's name or trade-mark,
- b) the pipe size and class,
- c) the month and year of manufacture, and
- d) any other mark required by the purchaser.

7.1 Standard Marking — Details available with the Bureau of Indian Standards, New Delhi.

EXPLANATORY NOTE

This standard has been prepared with a view to guide the industries with regard to dimensional requirements for rubber sealing rings for C.I.D. joints.


This standard has been revised to cover sizes up to 600 mm nominal diameter and additional classes 20 and 25.

Adopted 20 January 1988

© August 1988, BIS

Gr 1

TABLE 1 DIMENSIONS OF RUBBER SEALING RINGS
(Clauses 4.1 and 4.2)

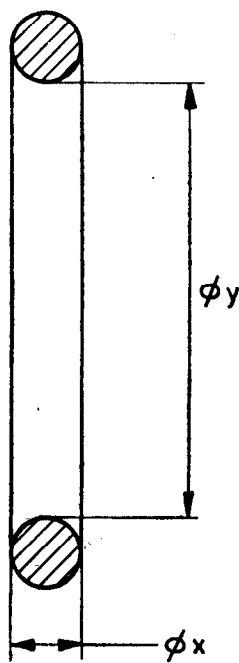

Nominal Dia of Pipe and Joint mm	Class	Inner Dia Y mm	Cross Sectional Dia X mm	Number Per Set
(1)	(2)	(3)	(4)	(5)
80	5, 10, 15, 20	90	14	2
	25	90	14	2
100	5, 10, 15, 20	109	14	2
	25	115	14	2
125	5, 10, 15, 20	131	14	2
	25	138	14	2
150	5, 10, 15, 20	155	14	2
	25	165	14	2
200	5, 10, 15, 20	201	14	2
	25	219	14	2
250	5, 10, 15, 20	246	14	2
	25	264	14	2
300	5, 10, 15, 20	293	14	2
	25	316	14	2
350	5, 10, 15, 20	345	16	2
	25	362	16	2
400	5, 10, 15, 20	392	16	2
	25	412	16	2
450	5, 10, 15, 20	438	18	2
	25	459	18	2
500	5, 10, 15, 20	487	20	2
	25	510	20	2
600	5, 10, 15, 20	585	20	2
	25	613	20	2

Note — Rubber sealing rings of nominal diameter more than 600 mm may also be manufactured. In such cases detailed dimensions and tolerances may be as mutually agreed between the manufacturer and the user.