

AMENDMENT No. 1 : 2010
TO
AIS-102 (Part 1): 2009 CMVR Type Approval for Hybrid Electric Vehicles

1. Page 2/32, Clause 9.0

Substitute following text for existing text :

“9.0 ENGINE AND MOTOR POWER TEST

9.1 Engine Power Test

Engine power shall be tested as per applicable current practices for CI and SI engines.

9.2 Motor Power Test

Electric drive train(s) shall be tested as per procedure given below:

9.2.1 These requirements apply for measuring the maximum net power and the maximum 30 minute power of electric drive trains used for propelling pure electric/ hybrid road vehicles.

9.2.2 Test Conditions

9.2.2.1 The drive train shall have been run-in according to the manufacturer's recommendations.

9.2.2.2 If the power measurement can be carried out only on a drive train with the gear-box or a reducer mounted, the efficiency shall be taken into account.

9.2.2.3 Auxiliaries

9.2.2.3.1 Auxiliaries to be Fitted

During the test, the auxiliaries necessary for the drive train operation in the intended application (as listed in Table 1 below) shall be installed in the same position as in the vehicle.

9.2.2.3.2 Auxiliaries to be Removed

The auxiliaries necessary for the proper operation of the vehicle, and which may be mounted on the motor shall be removed when performing the test. The following non-exhaustive list is given as an example :

Air compressor for brakes;
Power steering compressor;
Suspension system compressor;
Air conditioner system, etc.

Where accessories can not be removed, the power they absorb in the unloaded condition may be determined and added to the measured power.

Table – 1

Auxiliaries to be Fitted for the Test to Determine Net Power and the Maximum 30 Minute Power of Electric Drive Trains

(“Standard-production equipment” means equipment provided by the manufacturer for a particular application)

No.	Auxiliaries	Fitted for Net Power and Max 30 Minute Power Test
1	DC voltage source	Voltage drop during test less than 5%
2	Speed variator and control vehicle	Yes: Standard-production equipment
3	Liquid Cooling : Motor bonnet } Bonnet outlet }	No
	Radiator ^{(1) (2)} } Fan } Fan cowl } Pump } Thermostat ⁽³⁾ }	Yes: Standard-production equipment
	AIR COOLING Air filter } Cowl } Blower } Temperature adjustment system }	Yes: Standard-production equipment
4	Electric equipment	Yes : Standard-production equipment
5	Bench test auxiliary fan	Yes, if necessary

(1) The radiator, the fan, the fan cowl, the water pump and the thermostat shall be located on the test bench in the same relative position as on the vehicle. The cooling-liquid circulation shall be activated by the drive train water pump only.

Cooling of the liquid may be produced either by the drive train radiator, or by an external circuit, provided that the pressure loss of this circuit and the pressure at the pump inlet remain substantially the same as those of the drive train cooling system. The radiator shutter, if any, shall be in the open position.

Where the fan, radiator and fan cowl can not conveniently be fitted for the bench test, the power absorbed by the fan when separately mounted in its correct position in relation to the radiator and cowl (if used), shall be determined at the speed corresponding to the motor speeds used for measurement of the motor power either by calculation from standard characteristics or by practical tests. This power, corrected to the standard atmospheric conditions should be deducted from the correct power.

(2) Where a disconnectable or progressive fan or blower is incorporated, the test should be carried out with the disconnected fan (or blower) disconnected or at maximum slip condition.

(3) The thermostat may be fixed in the fully open position.

9.2.2.4 Setting Conditions

The setting conditions shall conform to the manufacturer's specifications for the production motor and be used without further alteration for the particular application.

9.2.2.5 Data to be Recorded

9.2.2.5.1 The test for determining the net power shall be carried out with the accelerator control set at the maximum position.

9.2.2.5.2 The motor must have been run-in in accordance with the recommendations of the applicant for the approval.

9.2.2.5.3 Torque and speed data shall be recorded simultaneously.

9.2.2.5.4 If needed, the cooling liquid temperature recorded at the motor outlet must be maintained at $\pm 5\text{K}$ of the thermostat temperature setting specified by the manufacturer.

For air cooling drive trains, the temperature at a point indicated by the manufacturer shall be kept within $\pm 0/-20\text{K}$ of the maximum value specified by the manufacturer.

9.2.2.5.5 The temperature of the lubricating oil measured in the oil sump or at the outlet from the oil temperature exchanger (if any) shall be maintained within the limits prescribed by the manufacturer.

9.2.2.5.6 An auxiliary regulating system may be used, if necessary, to maintain the temperature within the limits specified in Paragraphs 9.2.5.4. and 9.2.5.5.

9.2.3 Accuracy of Measurements

9.2.3.1 Torque : $\pm 1\%$ of measured torque.

The torque measuring system shall be calibrated to take friction losses into account. The accuracy in the lower half of the measuring range of the dynamometer bench may be $\pm 2\%$ of measured torque.

9.2.3.2 Motor Speed : 0.5% of measured speed.

9.2.3.3 Motor Inlet Air Temperature : $\pm 2\text{K}$.”

9.2.4 Test Procedure

Motor shall be tested as per test procedure specified in AIS-041: 2003.

PRINTED BY
THE AUTOMOTIVE RESEARCH ASSOCIATION OF INDIA
P.B. NO. 832, PUNE 411 004

ON BEHALF OF
AUTOMOTIVE INDUSTRY STANDARDS COMMITTEE

UNDER
CENTRAL MOTOR VEHICLE RULES – TECHNICAL STANDING
COMMITTEE

SET-UP BY
MINISTRY OF ROAD TRANSPORT & HIGHWAYS
(DEPARTMENT OF ROAD TRANSPORT & HIGHWAYS)
GOVERNMENT OF INDIA

April 2010

AUTOMOTIVE INDUSTRY STANDARD

**CMVR Type Approval for
Hybrid Electric Vehicles**

PRINTED BY
THE AUTOMOTIVE RESEARCH ASSOCIATION OF INDIA
P.B. NO. 832, PUNE 411 004
ON BEHALF OF
AUTOMOTIVE INDUSTRY STANDARDS COMMITTEE
UNDER
CENTRAL MOTOR VEHICLE RULES – TECHNICAL STANDING COMMITTEE
SET-UP BY
MINISTRY OF ROAD TRANSPORT & HIGHWAYS
(DEPARTMENT OF ROAD TRANSPORT & HIGHWAYS)
GOVERNMENT OF INDIA

September 2009

Status chart of the standard to be used by the purchaser for updating the record

Sr. No.	Corrigenda.	Amendment	Revision	Date	Remark	Misc.
General remarks :						

INTRODUCTION

The Government of India felt the need for a permanent agency to expedite the publication of standards and development of test facilities in parallel when the work of preparation of standards is going on, as the development of improved safety critical parts can be undertaken only after the publication of the standard and commissioning of test facilities. To this end, the erstwhile Ministry of Surface Transport (MoST) has constituted a permanent Automotive Industry Standard Committee (AISC) vide order no. RT-11028/11/97-MVL dated September 15, 1997. The standards prepared by AISC will be approved by the permanent CMVR Technical Standing Committee (CTSC) after approval, The Automotive Research Association of India, (ARAI), Pune, being the secretariat of the AIS Committee, has published this standard. For better dissemination of this information, ARAI may publish this document on their website.

This standard prescribes the CMVR type approval requirements for Hybrid Electric Vehicles.

While preparing this standard considerable assistance has been derived from the following ECE Regulations:

1. ECE R 83 : Uniform provisions concerning the approval of vehicles with regard to the emission of pollutants according to engine fuel requirements
2. ECE R 100 : Uniform provisions concerning the approval of battery electric vehicles with regard to specific requirements for the construction and functional safety
3. ECE R 101 : Uniform provisions concerning the approval of passenger cars powered by an internal combustion engine only, or powered by a hybrid electric power train with regard to the measurement of the emission of carbon dioxide and fuel consumption and/or the measurement of electric energy consumption and electric range, and of categories M1 and N1 vehicles powered by an electric power train only with regard to the measurement of electric energy consumption and electric range

The Automotive Industry Standard Committee responsible for preparation of this standard is given in Annex H

CMVR Type Approval for Hybrid Electric Vehicles

Clause/ Annex No.	Contents	Page No.
1.0	Scope	1/32
2.0	References	1/32
3.0	Definitions	1/32
4.0	Applicability of the Rules Prescribed in Central Motor Vehicles Rules, 1989 (CMVR)	2/32
5.0	Applicability of Standards Notified under Rule 124 of CMVR	2/32
6.0	Unaffected Provisions	2/32
7.0	Emission Test Procedure	2/32
8.0	Brake Performance	2/32
9.0	Power Test	2/32
10.0	Measurement of Pass by Noise Level	2/32
11.0	Additional Requirements	3/32
12.0	Technical Specifications	3/32
13.0	Changes in the Technical Specifications already Type Approved	3/32
14.0	Conformity of Production Requirements	4/32
15.0	Validity of Annexes	4/32
16.0	Transitory Provisions	4/32
ANNEXES		
Annex A	The Changes Needed in CMVR 1989.	5/32
Annex B	The Changes Needed in MORTH/CMVR/TAP-115/116 for Emission Tests and Measurement of Fuel Consumption	6/32
Annex C	Additional Requirements for Regenerative Braking System	15/32
Annex D	Method of Measuring the Electric Range of Vehicles Powered by a Hybrid Electric Power Train	17/32
Annex E	Electrical Energy/Power Storage Device State of Charge (SOC) Profile for OVC-HEV's.	21/32
Annex F	Special Requirements for Measurement and Correction of the Test Results for CO ₂ and Fuel Consumption for Not Externally Chargeable (NOVC) HEV's.	22/32
Annex G	The Additional Information Needed for HEV's	27/32
Annex H	Automotive Industry Standard Committee Responsible for Preparation of this Standard	32/32

CMVR Type Approval for Hybrid Electric Vehicles

1.0 SCOPE

This standard lays down the requirements specific to hybrid electric vehicles of M and N category of vehicles, whose GVW does not exceed 3500 kg and L category vehicles as defined in AIS-053.

2.0 REFERENCES

- a) AIS-007 : Information on Technical Specifications to be Submitted by the Vehicle Manufacturer
- b) AIS-038 : Battery Operated Vehicles – Requirements for Construction and Functional Safety
- c) AIS-039 : Battery Operated Vehicles – Measurement of Electrical Energy Consumption
- d) AIS-041 : Battery Operated Vehicles Measurement of Net Power and the Maximum 30 Minute Power and Speed
- e) AIS-049 : Battery Operated Vehicles - CMVR Type Approval for Battery Operated Vehicles
- f) AIS-053 : Automotive Vehicles – Types – Terminology
- g) IS 2 : Rules for Rounding off Numerical Values
- h) IS 14664:1999 : Automotive Vehicles - Performance Requirements and Testing Procedure for Braking System of Two and Three Wheeled Motor Vehicles
- i) IS 11852: 2001 : Automotive Vehicles - Brakes and Braking Systems (Parts 1 to 9)
- j) MoRTH/CMVR/ TAP-115/116 : Document on Test Methods, Testing Equipment and Related Procedure for Testing Type Approval and Conformity of Production (COP) of Vehicles for Emission as per CMV Rules 115, 116 and 126
- k) Central Motor Vehicle Rules 1989

3.0 DEFINITIONS

For the purpose of this standard the following definitions shall apply

- 3.1 **For a Hybrid Electric Vehicle (HEV)**, the "power train" comprises a combination of two different drive train types:
 - an internal combustion engine, and
 - one (or several) electric drive train(s)
- 3.2 **Hybrid Electric Vehicle (HEV)** means a vehicle that, for the purpose of mechanical propulsion, draws energy from both of the following on-vehicle sources of stored energy/power
 - a consumable fuel
 - an electrical energy/power storage device (e.g.: battery, capacitor, flywheel/ generator etc.)

3.3 Where necessary, the definitions given in Annex E of AIS-049 shall apply.

4.0 APPLICABILITY OF THE RULES PRESCRIBED IN CENTRAL MOTOR VEHICLES RULES, 1989 (CMVR)

4.1 The changes needed in Rule 2 of CMVR to take into account the requirement specific to hybrid vehicles are given in Annex A.

4.2 All the other rules of CMVR, prescribed for category of the vehicle it belongs to and the fuel used are applicable.

5.0 APPLICABILITY OF STANDARDS NOTIFIED UNDER RULE 124 OF CMVR

5.1 **Fuel Consumption: (Sl. No. 31 of S.O. 1365(E) dated 13th December 2004)**

The changes in the test procedure MoRTH/CMVR/TAP-115/116 for measuring the fuel consumption are given in Annex B.

5.2 All other standards notified under Rule 124 of CMVR as applicable for category of the vehicle it belongs to and the fuel used, shall be complied with.

6.0 UNAFFECTED PROVISIONS

If a base model is type approved, the test carried out for parameters, subject to the CEA of the such provisions, which are not affected by conversion to HEV's (covered in this standard) shall not be carried out and approvals shall be automatically extended for the HEV's.

7.0 EMISSION TEST PROCEDURE

7.1 The changes in the emission test procedure MoRTH/CMVR/TAP-115/116 for verifying compliance to Rule 115 of CMVR for verification of emission standards are given in Annex B.

7.2 When tested as per this procedure, the vehicle shall comply with the emission norms prescribed for category of the vehicle it belongs to and the fuel used.

8.0 BRAKE PERFORMANCE

The changes needed in the test procedure (IS 14664:1999 and IS 11852: 2001, Parts 1 to 9) for evaluating the prescribed performance requirements of braking systems, to take into account regenerative braking system of HEV's, are given in Annex C.

9.0 ENGINE POWER TEST

Engine power shall be tested as per applicable current practices for CI and SI engines.

10.0 MEASUREMENT OF PASS BY NOISE LEVEL

Noise test shall be as per current CMVR rules. In the case of series HEV's, the approach speed for noise testing shall be as given in clause 3.2 of AIS-049.

11.0 ADDITIONAL REQUIREMENTS

The HEV's shall comply with the following clauses of AIS-038

- 11.1 Clause 3.1. Traction Battery
- 11.2 Clause 3.2 Protection against Electric Shock
- 11.3 Clause 3.3 Functional Safety Requirements, except the requirement of 3.3.11

Requirements of clause 3.3.14 shall be applicable only if an "on board charger" is provided.

12.0 TECHNICAL SPECIFICATIONS

The information to be submitted by the manufacturer for type approval shall contain the information given in the version of AIS-007 as applicable to that category of vehicle.

The additional information needed for HEV's are given in Annex G.

13.0 CHANGES IN THE TECHNICAL SPECIFICATIONS ALREADY TYPE APPROVED

- 13.1 Every modification pertaining to the information declared in accordance with paragraph 12 shall be intimated by the manufacturer to the testing agency.
- 13.2 If the changes are in parameters not related to the provisions, no further action need be taken.

If the changes are in parameters related to the provisions, the testing agency shall then consider, whether,

- a) the model with the changed specifications still complies with provisions; or,
- b) any further verification is required to establish compliance.

For considering whether any further verification is required or not, guidelines given in Annex F of AIS-049 shall be used for the electrical requirements. For other cases, the guide lines given in the individual standard shall be applicable.

- 13.3 In case of 13.2 b), verification for only those parameters which are affected by the modifications needs to be carried out.
- 13.4 In case of fulfillment of criterion of para 13.2 a) or after results of further verification as per para of 13.2 b) are successful, the approval of compliance shall be extended for the changes carried out.
- 13.5 Tests such as Evaporative emission, crankcase emission, idling emission, full load smoke (for diesel engine vehicles) etc. need not be carried out, if the related technical specification is same as those of a model already type approved.

14.0 CONFORMITY OF PRODUCTION REQUIREMENTS

- 14.1 Vehicle approved under this standard shall be so manufactured as to conform to the type approved as per this AIS.
- 14.2 Verification of COP by the testing agencies for the emission requirements shall be as per the procedure laid down in CMVR and MORTH/CMVR/TAP-115/116.
- 14.3 Verification of COP for the other provisions shall be applicable as per Whole Vehicle COP procedure, as and when laid down by the Ministry of Road Transport and Highways.

15.0 VALIDITY OF ANNEXES

It is expected that in due course of time the details given in Annexes A to G would be incorporated in CMVR and other related documents referred in this AIS. Once, such an incorporation takes place, the details given in these annexes would be automatically defunct.

16.0 TRANSITORY PROVISIONS

- 16.1 Testing agency may issue a provisional certificate of compliance to CMVR for HEV's, based on compliance to this standard, before this standard is adopted by CMVR TSC and/or notified in CMVR.

Such provisional certificates shall indicate the following:

“This certificate is issued based on compliance to AIS-102 (Part 1), which is not yet notified in CMVR. This certificate is valid for a period of 6 months from date of notification of this standard and needs to be revalidated thereafter.”

ANNEX A

(See 4.1)

THE CHANGES NEEDED IN CMVR 1989

A-1.0 Rule 2 definitions

After the existing sub-rule (v) of Rule 2, insert the following as sub-rule (w)

“(w) Hybrid Electric Vehicle (HEV)” means a vehicle that, for the purpose of mechanical propulsion, draws energy from both of the following on-vehicle sources of stored energy/power :

- a consumable fuel and
- an electrical energy/power storage device (e.g.: battery, capacitor, flywheel / generator etc.)”

ANNEX B
(See 5.1 and 7.1)

**THE CHANGES NEEDED IN MORTH/CMVR/TAP-115/116
FOR EMISSION TESTS AND MEASUREMENT OF
FUEL CONSUMPTION FOR HYBRID ELECTRIC VEHICLES**

B-1.0 Categories of Hybrid Electric Vehicles

HEV's are categorized as below.

Vehicle charging	Off Vehicle Charging (OVC) ^{1/}		Not Off Vehicle Charging (NOVC) ^{2/}	
	without	with	without	with
Operating mode switch				
^{1/} also known as “externally chargeable” ^{2/} also known as “not externally chargeable”				

B-2.0 Type I test method for Externally Chargeable (OVC HEV) without an Operating Mode Switch

Two tests shall be performed under the following conditions

- (a) **Condition A:** test shall be carried out with a fully charged electrical energy / power storage device.
- (b) **Condition B:** test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- (c) The profile of the state of charge (SOC) of the electrical energy/power storage device during different stages of the Type I test for condition A and B are given in Annex E.

B-2.1. Condition A

B-2.1.1. Discharge of Battery

The procedure shall start with the discharge of the electrical energy / power storage device of the vehicle while driving (on the test track, on a chassis dynamometer, etc.) :

- a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up
- b) or, if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine or for other reasons, the speed shall be reduced until the vehicle can run at a lower steady speed where the fuel consuming engine does not start up for a defined time/distance (to be specified between testing agency and manufacturer).
- c) or with manufacturer's recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

B-2.1.2 Conditioning of Vehicle

B-2.1.2.1 M and N Category fitted with Compression Ignition Engine

Vehicle shall be driven according to paragraph B-2.1.4.2. for three consecutive Part II cycles of the modified Indian driving cycle defined in Table II of Annex IV B of CMVR 1989.

B-2.1.2.2 M and N Category fitted with Positive Ignition Engine

Vehicle shall be driven according to paragraph B-2.1.4.2. for one Part One and two Part Two driving cycles of the modified Indian driving cycle defined in Table I and Table II of Annex IV B respectively of CMVR 1989.

B-2.1.2.3 L Category

Vehicle shall be driven according to paragraph B-2.1.4.2 for three consecutive cycles of IDC defined in Annexure II of CMVR 1989.

B-2.1.3 Soak

B-2.1.3.1 After this preconditioning, and before testing, the vehicle shall be soaked as prescribed for IC engined vehicles as per MORTH/CMVR/TAP-115/116 and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph B-2.1.3.2.

B-2.1.3.2 During soak, the electrical energy/power storage device shall be charged:

- (a) with the on board charger if fitted, or
- (b) with an external charger recommended by the manufacturer, using the normal overnight charging procedure (see D-4.1.2.)

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalization charges or the servicing charges. The manufacturer shall declare that during the test, a special charge procedure has not occurred

- (c) For details of end of charge, see D-4.1.3.

B-2.1.4 Mass Emission Test

B-2.1.4.1 Mass emission test shall be carried out, as prescribed for corresponding IC engined vehicle

B-2.1.4.2 However, in case of special gear shifting strategy according to the manufacturer's instructions, as incorporated in the drivers' handbook of production vehicles and indicated by a technical gear shift instrument (for drivers information) shall be followed. For these vehicles the gear shifting points prescribed in MORTH/CMVR/TAP-115/116 are not applied.

B-2.1.4.3 In the case of L category vehicle, the weight of traction battery shall be ignored for the purpose of calculating the reference mass and inertia mass.

B-2.1.4.4 Measurement of Energy

Within the 30 minutes after the conclusion of the cycle, of the v_1 test, the electrical energy/power storage device shall be charged according to paragraph D-4.1.2 and D-4.1.3.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e_1 [Wh] delivered from the mains.

The electric energy consumption for condition A is e_1 [Wh].

B-2.1.4.5 Number of tests to be carried and averaging shall be as prescribed in MORTH/CMVR/TAP-115/116 for IC engined vehicles.

B-2.2 Condition B

B-2.2.1 Conditioning of vehicle: shall be as per paragraph B-2.1.2

B-2.2.2 Discharge of battery shall be as per paragraph B-2.1.1

B-2.2.3 After this discharge of the battery and before testing, the vehicle shall be soaked as prescribed for IC engined vehicles as per MORTH/CMVR/TAP-115/116.

B-2.2.4 Mass emission test shall be as per B-2.1.4

B-2.2.5 Measurement of Energy

B-2.2.5.1 Within the 30 minutes after the conclusion of the cycle, of the v_1 test, the electrical energy/power storage device shall be charged according to paragraph D-4.1.2 and D-4.1.3.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e_2 [Wh] delivered from the mains.

B-2.2.5.2 The electrical energy/power storage device of the vehicle shall be discharged in accordance with paragraph B-2.1.1.

B-2.2.5.3 Within the 30 minutes after discharge, the electrical energy/power storage device shall be charged according to paragraph D-4.1.2 and D-4.1.3.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e_3 [Wh] delivered from the mains.

B-2.2.5.4 The electric energy consumption e_4 [Wh] for condition B is:
 $e_4 = e_2 - e_3$

B-2.3.0 Final Test Results

B-2.3.1 The final results of pollutants for deciding on compliance and for CO₂ shall be:

$$M_i = (D_e \times M_{1i} + D_{av} \times M_{2i}) / (D_e + D_{av})$$

where

M_i = mass emission of the pollutant i in grams per kilometer

M_{1i} = average mass emission of the pollutant i in grams per kilometre with a fully charged electrical energy/power storage device, determined as per paragraph B-2.1.4

M_{2i} = average mass emission of the pollutant i in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) determined as per paragraph B-2.2.4

D_e = vehicle electric range, according to the procedure described in Annex D.

D_{av} = 25 km (average distance between two battery recharges)

B-2.3.2 Fuel Consumption

Reported fuel consumption shall be calculated by carbon balance method, as per procedure prescribed in MORTH/CMVR/TAP-115/116, except that the values of HC, CO and CO₂ for calculation of fuel consumption shall be based on figures arrived at, as per paragraph B-2.3.1.

B-2.3.3 Electric Energy Consumption

B-2.3.3.1 The values of electric energy consumption shall be

$$E_1 = e_1 / D_{test1} \text{ [Wh/km] for condition A, and}$$

$$E_4 = e_4 / D_{test2} \text{ [Wh/km] for condition B}$$

with D_{test1} and D_{test2} are the actual driven distances in the tests performed under conditions A (B-2.1.4.) and B (B-2.2.4) respectively, and e₁ and e₄ determined in paragraphs B-2.1.4.4. and B-2.2.5.4 respectively.

B-2.3.3.2 The weighted values of electric energy consumption shall be calculated as below:

$$E = (D_e * E_1 + D_{av} * E_4) / (D_e + D_{av})$$

Where:

E = electric consumption Wh/km

E₁ = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated as per B-2.3.3.1.

E_4 = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) B-2.3.3.1.

D_e = vehicle electric range, according to the procedure described in Annex D.

D_{av} = 25 km (assumed average distance between two battery recharges)

B-2.4 If the tests are carried out only for measurement of CO₂, fuel consumption and electrical energy:

B-2.4.1 Only one test need be carried out and the conditions of paragraph B-2.1.4.5 are not applicable.

B-2.4.2 The preconditioning as per paragraph B-2.2.1 need to be carried out only on manufacturer's request.

If measurement of electric energy consumption is not part of the test, it is not necessary to carry out the measurement as per paragraphs B-2.1.4.4 and B-2.2.5.

B-3.0 Type I Test for Externally Chargeable (OVC HEV) with an Operating Mode Switch

B-3.1 The operating mode switch shall be positioned according the table below

Hybrid-modes Battery State of charge	- Pure electric - Hybrid Switch in position	- Pure fuel consuming - Hybrid Switch in position	- Pure electric - Pure fuel consuming - Hybrid Switch in position	- Hybrid mode n ^{1/} - Hybrid mode m ^{1/} Switch in position
Condition A Fully charged	Hybrid	Hybrid	Hybrid	Most electric hybrid mode ^{2/}
Condition B Min. state of charge	Hybrid	Fuel consuming	Fuel consuming	Most fuel consuming mode ^{3/}

^{1/} For instance: sport, economic, urban, extra urban position

^{2/} Most electric hybrid mode:

The hybrid mode which can be proven to have the highest electricity consumption of all selectable hybrid modes when tested in accordance with Condition A of Annex B, to be established based on information/test reports provided by the manufacturer and in agreement with the testing agency.

^{3/} Most fuel consuming mode:

The hybrid mode which can be proven to have the highest fuel consumption of all selectable hybrid modes when tested in accordance with Condition B of Annex B, to be established based on information/test reports provided by the manufacturer and in agreement with the testing agency.

B-3.2 Two tests shall be performed one under Condition A and the other under Condition as defined in B-2.0. The test procedures for Condition A and Condition B shall be same as those given in B-2.1 and B-2.2 respectively, except that the switching modes shall be as given in B-3.1, B-3.2.1 and B-3.3.

B-3.2.1 However, if the pure electric range of the vehicle measured in accordance with Annex-D is higher than one full emission test cycle, on the request of the manufacturer, the Type I test for condition A may not be carried out.

In such cases, the value of M_{li} shall be taken as zero for calculation of final results. (B-2.3.1 and B-2.3.2).

In this case, engine preconditioning prescribed in paragraph B-2.1.2 can be omitted at the request of manufacturer.

B-3.3 Discharge of Battery

B-3.3.1 In the case of OVC HEV's equipped with a pure electric mode, the procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent of the maximum thirty minutes speed of the vehicle (determined according to clause 6.0 of AIS-041).

Stopping the discharge occurs when any of the following conditions happens, earliest :

- when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed; or
- when an indication to stop the vehicle is given to the driver by the standard onboard instrumentation, or
- after covering the distance of 100 km.

B-3.3.2 In case of HEV's not equipped with "pure electric" mode, the discharge procedure shall be as per B-2.1.1.

B-3.4 Final test results shall be obtained using procedure given in B-2.3.

B-4.0 Type I Tests for Not Externally Chargeable (NOT OVC HEV) without an Operating Mode Switch

B-4.1 These vehicles shall be tested according to MORTH/CMVR/TAP-115/116

B-4.2 In the case of M and N category vehicles, for preconditioning, at least two consecutive complete driving cycles (one Part One and one Part Two) are carried out without soak.

In the case of L category vehicles, preconditioning as per B-2.1.2.3 are carried out without soak.

B-4.3 The vehicle shall be driven according to driving cycles prescribed, taking into account requirements given in paragraph B-2.1.4.2 in case of special gear shifting strategy.

- B-4.4 Special requirements for measurement and correction of the test results for CO₂ and fuel consumption are given in Annex F.
- B-5.0 Type I Tests for Not Externally Chargeable (NOT OVC HEV) with an Operating Mode Switch**
- B-5.1 These vehicles shall be tested in Hybrid mode, according to MORTH/CMVR/TAP-115/116. If several hybrid modes are available, the test shall be carried out in the mode that is automatically set after turn on of the ignition key (normal mode). On the basis of information provided by the manufacturer, the testing agency will make sure that the limit values are met in all hybrid modes.
- B-5.2 Preconditioning of vehicle shall be as per B-4.2.
- B-5.3 The vehicle shall be driven according to driving cycles prescribed, taking into account requirements given in paragraph B-2.1.4.2 in case of special gear shifting strategy.
- B-5.4 Special requirements for measurement and correction of the test results for CO₂ and fuel consumption are given in Annex F.
- B-6.0 Type II Test Methods (Idling Emissions) for SI Engines**
- B-6.1 The vehicles shall be tested according to MoRTH/CMVR/TAP-115/116 with the fuel consuming engine running.
- B-6.2 The manufacturer shall provide a “service mode” that makes execution of this test possible, However for HEV’s using constant speed engine for charging of batteries, above test shall be exempted.
- B-6.3 If necessary, the special procedure provided for in paragraph B-6.4. shall be used
- B-6.4 It shall be possible to inspect the vehicle for roadworthiness test in order to determine its performance in relation to the data collected in accordance with the procedure prescribed in MORTH/CMVR/ TAP-115/116. If this inspection requires a special procedure, this shall be detailed in the service manual (or equivalent media). This special procedure shall not require the use of special equipment other than that provided with the vehicle
- B-7.0 Type III Test Method: (Crank Case Emission)**
- B-7.1 In the case of M and N categories, the vehicles shall be tested according to conditions (1) and (2) of testing for crankcase emissions as mentioned in MoRTH/CMVR/TAP-115/116 with the fuel consuming engine running. The manufacturer shall provide a "service mode" that makes execution of this test possible.

- B-8.0 Type IV Test Method (Evaporative Emission)**
- B-8.1 In the case of petrol engined M and N categories, the vehicles shall be tested according to MoRTH/CMVR/TAP-115/116
- B-8.2 Before starting the test procedure (MoRTH/CMVR/TAP-115/116), the vehicles shall be preconditioned as follows:
- B-8.2.1 For Externally Chargeable (OVC HEV) Vehicles**
- B-8.2.1.1 For Externally Chargeable (OVC HEV) Vehicles without an Operating Mode Switch:** The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle as per paragraph B-2.1.1
- B-8.2.1.2 For Externally Chargeable (OVC HEV) Vehicles with an Operating Mode Switch with a “Pure Electric” mode:** The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position as per B-3.3.1.
- B-8.2.1.3 For Externally Chargeable (OVC HEV) Vehicles with Operating mode switch but without an Operating Mode for a “Pure Electric” mode:** The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle as per paragraph B-2.1.1.
- B-8.2.2 For Not Externally Chargeable (NOVC HEV) Vehicles**
- B-8.2.2.1 NOVC Vehicles without an Operating Mode Switch:** The procedure shall start with a preconditioning of at least two consecutive complete driving cycles (one Part One and one Part Two) without soak.
- B-8.2.2.2 NOVC Vehicles with an Operating Mode Switch:** The procedure shall start with a preconditioning of at least two consecutive complete driving cycles (one Part One and one Part Two) without soak, performed with the vehicle in “hybrid” mode. If several hybrid modes are available, the test shall be carried out in the mode which is automatically set after turn on of the ignition key (normal mode).
- B-8.3 The preconditioning drive and the dynamometer test shall be carried out according to cycles and procedure given in MORTH/CMVR/TAP-115/116.
- B-8.3.1 In the case of externally chargeable (OVC) HEV: Under the same conditions, as specified by condition B of the Type I test (paragraphs B-2.2 and B-3.2)
- B-8.3.2 In the case of not externally chargeable (NOVC) HEV:: Under the same conditions of Type I test as specified in B-4.2 and B-5.2.

B-9.0 Type V Test Methods (Durability)

In case the mileage accumulation for durability tests is opted by the vehicle manufacturer, vehicles shall be tested according to MoRTH/CMVR/TAP-115/116 with the following additional requirements.

B-9.1 For External Chargeable Vehicles (OVC)

B-9.1.1 It is allowed to charge the electrical energy/power storage device twice a day during mileage accumulation.

B-9.1.2 For External Chargeable vehicles (OVC) with an operating mode switch, mileage accumulation should be driven in the mode which is automatically set after turn on of the ignition key (normal mode). During the mileage accumulation a change into another hybrid mode is allowed if necessary in order to continue the mileage accumulation after agreement of the testing agency.

B-9.1.3 The measurements of emissions of pollutants shall be carried out under the same conditions as specified by condition B of the Type I test (paragraphs B-2.2 and B-3.2).

B-9.2 For Not Externally Chargeable (NOVC HEV) Vehicles

For not externally chargeable (NOVC HEV) vehicles with an operating mode switch, mileage accumulation shall be driven in the mode which is automatically set after turn on of the ignition key (normal mode). The measurements of emissions of pollutants shall be carried out in the same conditions as in the Type I test.(Refer B-5.0 and B-4.0).

ANNEX C

(See 8.0)

**ADDITIONAL REQUIREMENTS FOR
REGENERATIVE BRAKING SYSTEM****C-1.0 Definitions**

C-1.1 **Electric Regenerative Braking System:** A braking system, which during deceleration, provides for the conversion of vehicle kinetic energy into electrical energy.

C-1.2 **Electric Regenerative Brake Control:** A device which modulates the action of the electric regenerative braking system

C-1.3 **Electric Regenerative Braking System of Category A:** An electric regenerative braking system, which is not part of the service braking system.

C-1.4 **Electric Regenerative Braking System of Category B:** An electric regenerative braking system, which is part of the service braking system.

C-2.0 Vehicles fitted with Electric Regenerative Braking System of Category A

C-2.1 The electric regenerative braking shall be only activated by accelerator control and/or the gear neutral position. In addition, for vehicles of categories M2, the electric regenerative braking control can be a separate switch or lever.

C-2.2 In the case of vehicles fitted with Category A type of regenerative braking system, any separate electric regenerative braking control which is provided, shall not be used during the Type P and Type F tests.

C-3.0 Vehicles fitted with Electric Regenerative Braking System of Category B

C-3.1 It shall not be possible to disconnect partially or totally one part of the service braking system other than by an automatic device

C-3.2 The service braking system control shall also actuate the action of the electric regenerative braking system simultaneously.

C-3.3 The service braking system shall not be adversely affected by the disengagement of the motor(s) or gear ratio used, except during the short duration of operation of gear shifting.

C-3.4 In the case of L category, if the brake control (front or rear or combined) actuates the electric regenerative brake system the prescribed performance requirements shall be complied with the use of the electric regenerative system.

C-4.0 If so desired by the manufacturer the performance requirements may be verified without the use of the electric regenerative system by appropriately disconnecting the system. If, so this shall be recorded in the test report.

C-5.0 General

For vehicles powered completely or partially by an electric motor or motor(s), permanently connected to the wheels, all tests must be carried out with these motor(s) connected.

ANNEX D

(See B-3)

**METHOD OF MEASURING
THE ELECTRIC RANGE OF VEHICLES
POWERED BY A HYBRID ELECTRIC POWER TRAIN
(See B-2.3.1, B-2.3.3 and B-3.2.1)**

D-1.0 The test method described hereafter permits to measure the electric range, expressed in km, of externally chargeable HEV's (OVC-HEV) as defined in paragraph B-1.

D-2.0 Parameters, Units and Accuracy of Measurements

Parameters, units and accuracy of measurements shall be as given in Table D-1:

Table D1

(see D-2)

Parameters, Units and Accuracy of Measurements

Parameter	Unit	Accuracy	Resolution
Time	s	± 0.1 s	0.1 s
Distance	m	± 0.1 per cent	1 m
Temperature	°C	± 1 °C	1°C
Speed	km/h	± 1 per cent	0.2 km/h
Mass	kg	± 0.5 per cent	1 kg

D-3.0 Test Conditions

D-3.1 Condition of the Vehicle

D-3.1.1. The vehicle tyres shall be inflated to the pressure specified by the vehicle manufacturer when the tyres are at the ambient temperature.

D-3.1.2. The viscosity of the oils for the mechanical moving parts shall conform to the specifications of the vehicle manufacturer.

D-3.1.3. The lighting and light-signalling and auxiliary devices shall be off, except those required for testing and usual daytime operation of the vehicle.

D-3.1.4. All energy storage systems available for other than traction purposes (electric, hydraulic, pneumatic, etc.) shall be charged up to their maximum level specified by the manufacturer.

D-3.1.5. If the batteries are operated above the ambient temperature, the operator shall follow the procedure recommended by the vehicle manufacturer in order to keep the temperature of the battery in the normal operating range.

The manufacturer's agent shall be in a position to attest that the thermal management system of the battery is neither disabled nor reduced.

D-3.1.6. The vehicle must have run at least 300 km during the seven days before the test with those batteries that are installed in the test vehicle. This condition can be waived on request of the vehicle manufacturer

D-3.2 Climatic Conditions

D-3.2.1 For testing performed outdoors, the ambient temperature shall be between 5 °C and 32 °C.

D-3.2.2 The indoors testing shall be performed at a temperature between 20 °C and 30 °C.

D-3.2.3 The test may be carried out at temperatures different from those specified above, at the request of manufacturer.

D-4.0 Operation Modes

The test method includes the following steps:

- (a) Initial charge of the battery.
- (b) Application of the cycle and measurement of the electric range.
Between the steps, if the vehicle shall move, it is pushed to the following test area (without regenerative recharging).

D-4.1. Initial Charge of the Battery

Charging the battery consists of the following procedures:

Note: "Initial charge of the battery" applies to the first charge of the battery, at the reception of the vehicle. In case of several combined tests or measurements, carried out consecutively, the first charge carried out shall be an "initial charge of the battery" and the following may be done in accordance with the "normal overnight charge" procedure.

D-4.1.1. Discharge of the Battery

D-4.1.1.2. For externally chargeable hybrid electric vehicle (OVC HEV) without an operating mode switch:

D-4.1.1.2.1. The manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D-4.1.1.2.2. The procedure for discharge of the electrical energy/power storage device of the vehicle is as per paragraph B-2.1.1.

D-4.1.1.3. For externally chargeable hybrid electric vehicle (OVC HEV) with an operating mode switch.

D-4.1.1.3.1. If there is not a pure electric position, the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state. The procedure for discharge of the electrical energy/power storage device of the vehicle is as per paragraph B-2.1.1.

D-4.1.1.3.2. If there is a pure electric position, the procedure for discharge of the electrical energy/power storage device of the vehicle is as per paragraph B-3.3.1.

D-4.1.2. Application of a Normal Overnight Charge

The electrical energy/power storage device shall be charged according to the normal overnight charge procedure given below.

D-4.1.2.1 Normal Overnight Charge Procedure

The charging is carried out:

- (a) with the on board charger if fitted, or
- (b) with an external charger recommended by the manufacturer using the charging pattern prescribed for normal charging;
- (c) in an ambient temperature comprised between 20 °C and 30 °C.

Charging may be carried out at temperatures different from those specified above, at the request of manufacturer.

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges. The manufacturer shall declare that during the test, a special charge procedure has not occurred.

D-4.1.3 End of Charge Criteria

The end of charge criteria corresponds to a charging time of 12 hours, except if a clear indication is given to the driver by the standard instrumentation that the electrical energy/power storage device is not yet fully charged.

In this case,

$$\text{The maximum time is} = \frac{3 \times \text{claimed battery capacity (Wh)}}{\text{Mains power supply (W)}}$$

D-4.2. Application of the Cycle and Measurement of the Range

D-4.2.1. The applicable test sequence as per the driving cycle used for mass emission testing is applied on a chassis dynamometer until the end of the test criteria is reached. Gear shifting pattern shall be as prescribed in paragraph B-2.1.4.2.

D-4.2.2. The end of the test criteria is reached earliest:

D-4.2.2.1 When the vehicle is not able to meet the target curve up to 30 km/h,

D-4.2.2.2 or when an indication from the standard on-board instrumentation is given to the driver to stop the vehicle


- D-4.2.2.3 or when the fuel consuming engine starts up.
Then the vehicle shall be slowed down to 5 km/h by releasing the accelerator pedal, without touching the brake pedal and then stopped by braking.
- D-4.2.2.4 At a speed over speeds specified in paragraph D-4.2.2.1 when the vehicle does not reach the required acceleration or speed of the test cycle, the accelerator pedal shall remain fully depressed until the reference curve has been reached again.
- D-4.2.2.5 To respect human needs, up to three interruptions are permitted between test sequences, of no more than 15 minutes in total.
- D-4.2.2.6 At the end, the measure D_e of the covered distance in km is the electric range of the hybrid electric vehicle. It shall be rounded to the nearest whole number as per IS 2.

ANNEX E
(See B-2.0(c))

**ELECTRICAL ENERGY/POWER STORAGE DEVICE
STATE OF CHARGE (SOC) PROFILE FOR OVC-HEV'S.**


The SOC profiles for OVC-HEV's tested under conditions A and B are:

Condition A:

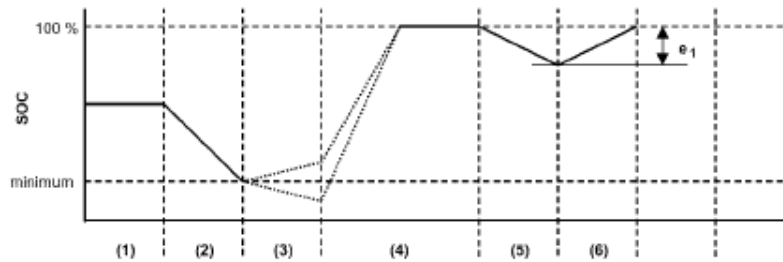

- (1) initial state of charge of the electrical energy/power storage device
- (2) discharge according to paragraph B-2.1.1 or B-3.3 of Annex-B
- (3) vehicle conditioning according to paragraph B-2.1.2 of Annex-B
- (4) charge during soak according to paragraph B-2.1.3.2 of Annex-B
- (5) test according to paragraph B-2.1.4 of Annex-B
- (6) charging (B-2.1.4.4)

Condition B:

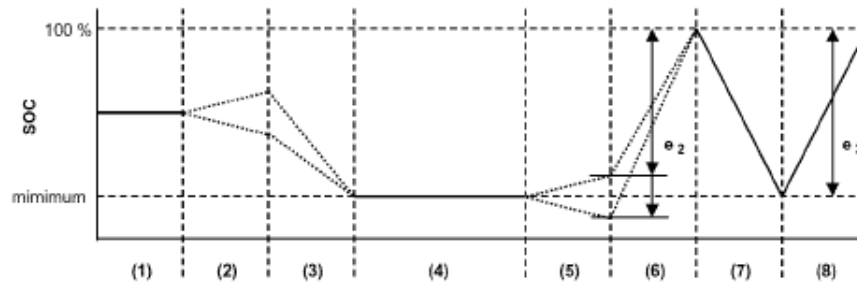

- (1) initial state of charge
- (2) vehicle conditioning according to paragraph B-2.2.1 of Annex-B
- (3) discharge according to paragraph B-2.2.2 of Annex-B
- (4) soak according to paragraph B-2.2.3 of Annex-B
- (5) test according to paragraph B-2.2.4 of Annex-B
- (6) charging according to paragraph B-2.2.5.1
- (7) discharging according to paragraph B-2.2.5.2.
- (8) charging according to paragraph B-2.2.5.3.

ANNEX F

(See B-4.4 and B-5.4)

**SPECIAL REQUIREMENTS FOR MEASUREMENT AND
CORRECTION OF THE TEST RESULTS FOR
CO₂ AND FUEL CONSUMPTION FOR
NOT EXTERNALLY CHARGEABLE (NOVC) HEV'S.**

F-1 In the case of M and N category vehicles, emissions of carbon dioxide (CO₂) and fuel consumption shall be determined separately for the Part One (urban driving) and the Part Two (extra-urban driving) of the specified driving cycle.

F-2 Test Results

F-2.1 The test results (fuel consumption C [l/100 km] and CO₂-emission M [g/km]) of the test are corrected in function of the energy balance ΔE_{batt} of the vehicle's battery. The corrected values (C_0 [l/100 km] and M_0 [g/km]) should correspond to a zero energy balance ($\Delta E_{\text{batt}} = 0$), and are calculated using a correction coefficient determined by the manufacturer as defined below. In case of other storage systems than an electric battery, ΔE_{batt} is representing $\Delta E_{\text{storage}}$, the energy balance of the electric energy storage device.

F-2.2 The electricity balance Q [Ah], measured using the procedure specified in F-6, is used as a measure of the difference in the vehicle battery's energy content at the end of the cycle compared to the beginning of the cycle. In the case of M and N category vehicles, the electricity balance is to be determined separately for the Part One cycle and the Part Two cycle.

F-2.3 Under the conditions below, it is allowed to take the uncorrected measured values C and M as the test results:

- a) in case the manufacturer can prove that there is no relation between the energy balance and fuel consumption,
- b) in case that ΔE_{batt} always corresponds to a battery charging,
- c) in case that ΔE_{batt} always corresponds to a battery discharging and ΔE_{batt} is within 1 per cent of the energy content of the consumed fuel (consumed fuel meaning the total fuel consumption over one cycle):

Energy content of the consumed fuel can be calculated from the following equation :

$$\text{Total Fuel Energy} = \text{NHV}_{\text{fuel}} * m_{\text{fuel}}$$

Where,

NHV_{fuel} = Net heating value of consumable fuel in J/kg

m_{fuel} = Total mass of fuel consumed over one test cycle

The change in battery energy content ΔE_{batt} can be calculated from the measured electricity balance Q as follows:

$$\Delta E_{\text{batt}} = \Delta \text{SOC}(\%) \cdot E_{\text{TEbatt}} \cong 0.0036 \cdot |\Delta \text{Ah}| \cdot V_{\text{batt}} = 0.0036 \cdot Q \cdot V_{\text{batt}} \quad (\text{MJ})$$

with E_{TEbatt} [MJ] the total energy storage capacity of the battery and V_{batt} [V] the nominal battery voltage.

F-3 Fuel Consumption Correction Coefficient (K_{fuel}) Defined by the Manufacturer

F-3.1 The fuel consumption correction coefficient (K_{fuel}) shall be determined from a set of n measurements performed by the manufacturer. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_j > 0$.

F-3.2 If the latter condition can not be realised on the driving cycle (Part One or Part Two of modified Indian Driving Cycle in the case of M and N category or IDC in the case of L category as applicable) used in this test, then it is up to the testing agency to judge the statistical significance of the extrapolation necessary to determine the fuel consumption value at $\Delta E_{batt} = 0$

The fuel consumption correction coefficient (K_{fuel}) is defined as

$$K_{fuel} = (n \cdot \sum Q_i C_i - \sum Q_i \cdot \sum C_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (l/100 \text{ km/Ah})$$

where:

C_i : fuel consumption measured during i-th manufacturer's test (l/100 km)

Q_i : electricity balance measured during i-th manufacturer's test (Ah)

n : number of data

The fuel consumption correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the fuel consumption correction coefficient is to be judged by the testing agency.

F-3.3 In the case of M and N category, separate fuel consumption correction coefficients shall be determined for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively

F-4 Fuel consumption at zero battery energy balance (C_0)

F-4.1 The fuel consumption C_0 at $\Delta E_{batt} = 0$ is determined by the following equation

$$C_0 = C - K_{fuel} * Q \text{ (l/100 km)}$$

where:

C : fuel consumption measured during test (l/100 km)

Q : electricity balance measured during test (Ah)

F-4.2 In the case of M and N category, fuel consumption at zero battery energy balance shall be determined separately for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively

F-5.0 CO₂-emission correction coefficient (K_{CO_2}) defined by the manufacturer

F-5.1 The CO₂-emission correction coefficient (K_{CO_2}) shall be determined as follows from a set of n measurements performed by the manufacturer. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_i > 0$. If the latter condition can not be realised on the driving cycle (Part One or Part Two in the case of M and N category or IDC as applicable) used in this test, then it is up to the testing agency to judge the statistical significance of the extrapolation necessary to determine the CO₂- emission value at $\Delta E_{batt} = 0$.

F-5.2 The CO₂-emission correction coefficient (K_{CO_2}) is defined as:

$$K_{CO_2} = (n \cdot \sum Q_i M_i - \sum Q_i \cdot \sum M_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (\text{g/km/Ah})$$

where

M_i : CO₂-emission measured during i-th manufacturer's test (g/km)

Q_i : electricity balance during i-th manufacturer's test (Ah)

n : number of data

The CO₂-emission correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the CO₂-emission correction coefficient is to be judged by the testing agency.

F-5.3 In the case of M and N category, separate CO₂-emission correction coefficients shall be determined for the CO₂ emission values measured over the Part One cycle and the Part Two cycle respectively.

F-5.4 CO₂-emission at zero battery energy balance (M_0).

F-5.5 The CO₂-emission M_0 at $\Delta E_{batt} = 0$ is determined by the following equation:

$$M_0 = M - K_{CO_2} * Q \text{ (g/km)}$$

where:

C : CO₂ emission measured during test (g/km)

Q : electricity balance measured during test (Ah)

F-5.6 In the case of M and N category, CO₂ - emission at zero battery energy balance shall be determined separately for the CO₂ - emission values measured over the Part One cycle and the Part Two cycle respectively

F-6.0 Electricity Balance**F-6.1 General**

- F-6.1.1. The purpose of this paragraph is to define the method and required instrumentation for measuring the electricity balance of Not externally chargeable Hybrid Electric Vehicles (NOVC HEVs). Measurement of the electricity balance is necessary to correct the measured fuel consumption and CO₂-emissions for the change in battery energy content occurring during the Type I test, using the method defined in paragraphs B-4 and B-5.
- F-6.1.2. The method described in this paragraph shall be used by the manufacturer for the measurements that are performed to determine the correction factors K_{fuel} and K_{CO_2} , as defined in paragraphs F-3.2 and F-5.2 The testing agency shall check whether these measurements have been performed in accordance with the procedure described in this annex.
- F-6.1.3. The method described in this paragraph shall be used by the testing agency for the measurement of the electricity balance Q , as defined in paragraphs F-4.1 and F-5.5.

F-6.2 Measurement Equipment and Instrumentation

- F-6.2.1 During the Type I tests as described in paragraphs B-4.0. and B-5.0, the battery current shall be measured using a current transducer of the clamp-on type or the closed type. The current transducer (i.e. the current sensor without data acquisition equipment) shall have a minimum accuracy of 0.5 per cent of the measured value or 0.1 per cent of the maximum value of the scale. OEM diagnostic testers are not to be used for the purpose of this test.
- F-6.2.1.1 The current transducer shall be fitted on one of the wires directly connected to the battery. In order to easily measure battery current using external measuring equipment, manufacturers should preferably integrate appropriate, safe and accessible connection points in the vehicle. If that is not feasible, the manufacturer is obliged to support the testing agency by providing the means to connect a current transducer to the wires connected to the battery in the above described manner.
- F-6.2.1.2 The output of the current transducer shall be sampled with a minimum sample frequency of 5 Hz. The measured current shall be integrated over time, yielding the measured value of Q , expressed in Ampere hours (Ah).
- F-6.2.1.3 The temperature at the location of the sensor shall be measured and sampled with the same sample frequency as the current, so that this value can be used for possible compensation of the drift of current transducers and, if applicable, the voltage transducer used to convert the output of the current transducer. Measurement of temperature can be skipped if accuracy of current measurement is guaranteed through the test term.

- F-6.2.2. A list of the instrumentation (manufacturer, model no., serial no.) used by the manufacturer for determining the correction factors K_{fuel} and K_{CO_2} (as defined in paragraphs F-3.2 and F-5.2) and the last calibration dates of the instruments (where applicable) should be provided to the testing agency.

F-6.3 Measurement Procedure

- F-6.3.1. Measurement of the battery current shall start at the same time as the test starts . and shall end immediately after the vehicle has driven the complete driving cycle.
- F-6.3.2. In the case of M and N category, separate values of Q shall be logged over the Part One and Part Two of the cycle.

ANNEX G

(See 12.0)

THE ADDITIONAL INFORMATION NEEDED FOR HEV'S**1.0 General Description of Vehicle**

- 1.1 Vehicle Model
- 1.2 Vehicle Type
- 1.3 Drawing and /or photographs of the vehicle
- 1.4 Type of hybrid vehicle (Externally chargeable/Not externally chargeable)
- 1.5 Mode selection switch provided: Yes/No
 - 1.5.1 If yes the modes available
 - 1.5.2 In the case of Externally Chargeable HEV's
 - 1.5.2.1 The hybrid mode which can be proven to have the highest electricity consumption
 - 1.5.2.2 The hybrid mode which can be proven to have the highest fuel consumption
 - 1.5.3 In the case of Not Externally Chargeable HEV's, the mode which is automatically set after turn on of the ignition key (normal mode)

2.0 Description of the Traction Battery

- 2.1 Trade Name and Mark of the Battery
- 2.2 Kind of Electro – Chemical Couple
- 2.3 Nominal Voltage , V
- 2.4 Battery Maximum Thirty Minutes Power (Constant Power Discharge), kW
- 2.5 Battery Performance in 2 h Discharge (Constant Power or Constant Current)
 - 2.5.1 Battery Energy , kWh
 - 2.5.2 Battery Capacity , Ah in 2 h
- 2.6 End of Discharge Voltage Value , V
- 2.7 Provision of ventilation for battery Yes / No
 - 2.7.1 Brief description of the ventilation system adopted in the vehicle. (Refer AIS-038 clause 3.1.1). Provide drawing if necessary.
 - 2.7.2 Brief description of the ventilation system adopted in the battery compartment. (Refer AIS-038 clause 3.1.2). Provide drawing if necessary.

- 2.8 On-board Indication of battery state of charge (Applicable if there is a “pure electric mode”
 - 2.8.1 Details of indication when state of charge of the battery reaches a level when the manufacturer recommends re-charging.
 - 2.8.1.1 Indication format.
 - 2.8.1.2 Relationship of state of charge indicator and the indication.
 - 2.8.1.3 Make
 - 2.8.1.4 Model
 - 2.8.2 Indication of state of charge of battery reaches a level at which driving vehicle further may cause damage to batteries
 - 2.8.2.1 Indication format.
 - 2.8.2.2 Relationship of state of charge indicator and the indication.
- 2.9 Battery Mass, kg
- 2.10 Brief description of maintenance procedure, if any
- 3.0 Description of the Drive Train**
 - 3.1 General**
 - 3.1.1 Make
 - 3.1.2 Type
 - 3.1.3 Use : Mono motor / multi motors (number)
 - 3.1.4 Transmission Arrangement parallel / transaxial / others
 - 3.1.5 Test Voltage , V
 - 3.1.6 Motor Nominal Speed , Min^{-1}
 - 3.1.7 Motor Maximum Speed, Min^{-1} or by default reducer outlet shaft / gear box speed (specify gear engaged)
 - 3.1.8 Maximum Power Speed , Min^{-1} and km/h
 - 3.1.9 Maximum Power , kW
 - 3.1.10 Maximum Thirty Minutes Power, kW
 - 3.1.11 Maximum Thirty Minutes speed km/h
 - 3.1.12 Range
 - 3.1.13 Speed at the beginning of the range, Min^{-1}
 - 3.1.14 Speed at the end of the range , Min^{-1}

- 3.2 Traction Motor
 - 3.2.1 Make
 - 3.2.2 Working Principle
 - 3.2.2.1 Direct current / alternating current / number of phases
 - 3.2.2.2 Separate excitation / series / compound
 - 3.2.2.3 Synchron / asynchron
 - 3.2.2.4 Coiled rotor / with permanent magnets / with housing
 - 3.2.2.5 Number of Poles of the Motor
 - 3.2.3 Motor power curve (kW) with motor RPM (min^{-1}) / vehicle speed in km/h
- 3.3 Power Controller
 - 3.3.1 Make
 - 3.3.2 Type
 - 3.3.3 Control Principle : vectorial / open loop / closed / other (to be specified)
 - 3.3.4 Maximum effective current supplied to the Motor, A
 - 3.3.5 Voltage range use , V to V
- 3.4 Cooling System
 - motor : liquid / air
 - controller : liquid / air
 - 3.4.1 Liquid cooling equipment characteristics
 - 3.4.1.1 Nature of the liquid ,
circulating pumps , yes / no
 - 3.4.1.2 Characteristics or make(s) and type(s) of the pump
 - 3.4.1.3 Thermostat : setting
 - 3.4.1.4 Radiator : drawing(s) or make(s) and type(s)
 - 3.4.1.5 Relief valve : pressure setting
 - 3.4.1.6 Fan : Characteristics or make(s) and type(s)
 - 3.4.1.7 Fan : duct
 - 3.4.2 Air-cooling equipment characteristics
 - 3.4.2.1 Blower : Characteristics or make(s) and type(s)

- 3.4.2.2 Standard air ducting
- 3.4.2.3 Temperature regulating system yes / no
- 3.4.2.4 Brief description
- 3.4.2.5 Air filter : make(s)
type(s)
- 3.4.3 Maximum temperatures recommended by the manufacturer:
- 3.4.3.1 Motor Outlet : °C
- 3.4.3.2 Controller inlet : °C
- 3.4.3.3 At motor reference point(s) °C
- 3.4.3.4 At controller reference point(s) °C
- 3.5 Insulating Category :
- 3.5.1 International Protection (IP)-Code :
- 3.6 Lubrication System Principle
 - Bearings : friction / ball
 - Lubricant : grease / oil
 - Seal : yes / no
 - Circulation : with / without
- 4.0 Charger (Applicable only for Externally Chargeable HEV's)**
- 4.1 Charger : on board / external
- 4.1.1 Trademark , model, rating
- 4.2 Description of the normal profile of charging system :
- 4.3 Specifications of mains
- 4.3.1 mains : single phase/ three phase :
- 4.3.2 Nominal Voltage (V) & frequency (Hz) with tolerances :
- 4.4 Reset period recommended between the end of the discharge and the start of the charge
- 4.5 Recommended duration of a complete charge
- 4.6 In case of on-board charger
 - 4.6.1 Continuous rating of charger socket (A) :
 - 4.6.2 Time rating (h) of charger socket, if any :
 - 4.6.3 Whether soft-start facility Yes / No :
 - 4.6.4 Maximum initial in-rush current (A)

- 5.0 Electrical Details of Vehicle for Functional Safety**
- 5.1 Schematic diagram showing the electrical layout giving all major electrical items along with their physical location in the vehicle. It shall include batteries, power-train components, protection fuses, circuit breakers etc. (Reference in AIS-038 clause 3.1.3)
- 5.2 Specifications of circuit breakers/ fuses used for protection of batteries / power-train (Reference in AIS-038 clause 3.1.3)
 - 5.2.1 IS / IEC specifications
 - 5.2.2 Rating (A)
 - 5.2.3 Opening time (ms)
- 5.3 Working voltage V (Reference in AIS-038 clause 3.2)
- 5.4 Schematic highlighting physical location of live parts having working voltage greater than 60 V DC or 25 V AC (Reference in AIS-038 clause 3.2.1.2)
- 5.5 Electric cables / connectors / wiring harness (Reference in AIS-038 clause 3.2.2.2)
 - 5.5.1 IEC protection class
 - 5.5.2 Insulation material used
 - 5.5.3 Conduits provided Yes / No
- 5.6 List of exposed conductive parts of on-board equipment. (Reference in AIS-038 clause 3.2.2.3)
 - 5.6.1 Any potential equalization resistance used to electrically connect these parts Yes/ No
 - 5.6.2 If yes, give details
- 5.7 List of failures due to which the vehicle will come to standstill (Reference in AIS-038 clause 3.3.6)
- 5.8 List of conditions under which the performance of vehicle is limited and how. (Reference in AIS-038 clause 3.3.13)
- 5.9 Declaration regarding Design guidelines followed with respect to various requirements
- 6.0 Electrical energy consumption of Vehicle in W-h/km, as per clause 5.5.1 of AIS-039
- 7.0 Special gear shifting pattern if any

ANNEX H
(See Introduction)

COMMITTEE COMPOSITION *

Automotive Industry Standards Committee

Chairman	
Shri Shrikant R. Marathe	Director The Automotive Research Association of India, Pune
Members	Representing
Representative from	Ministry of Road Transport & Highways (Dept. of Road Transport & Highways), New Delhi
Representative from	Ministry of Heavy Industries & Public Enterprises (Department of Heavy Industry), New Delhi
Shri S. M. Ahuja	Office of the Development Commissioner, MSME, Ministry of Micro, Small & Medium Enterprises, New Delhi
Shri Rakesh Kumar	Bureau of Indian Standards, New Delhi
Director Shri D. P. Saste (Alternate)	Central Institute of Road Transport, Pune
Dr. M. O. Garg	Indian Institute of Petroleum, Dehra Dun
Dr. C. L. Dhamejani	Vehicles Research & Development Establishment, Ahmednagar
Representatives from	Society of Indian Automobile Manufacturers
Shri T.C. Gopalan	Tractor Manufacturers Association, New Delhi
Shri K.N.D. Nambudiripad	Automotive Components Manufacturers Association of India, New Delhi
Shri Arvind Gupta	Automotive Components Manufacturers Association of India, New Delhi

Member Secretary
Mrs. Rashmi Urdhwareshe
Deputy Director
The Automotive Research Association of India, Pune

* At the time of approval of this Automotive Industry Standard (AIS)