

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

1<sup>st</sup> through 8<sup>th</sup> PRINTING (Posted: 09-26-13)

## CHAPTER 7 WALL COVERING

Figure 703.2.2

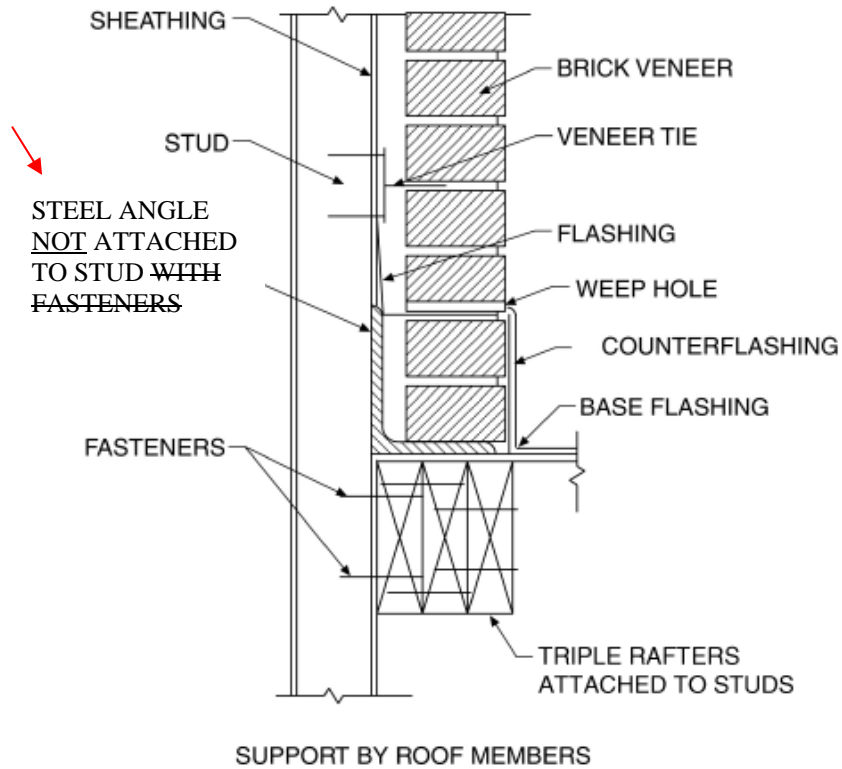


FIGURE R703.7.2.2  
EXTERIOR MASONRY VENEER SUPPORT BY ROOF MEMBERS

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

1<sup>st</sup> through 6<sup>th</sup> PRINTING (Posted 06-06-2012)

## CHAPTER 3 BUILDING PLANNING

**R301.2.2.3.2 Masonry construction.** Masonry construction shall comply with the requirements of Section 606.44.2. 12.2

## CHAPTER 8 ROOF-CEILING CONSTRUCTION

**TABLE 804.3.1(1)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(2)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(3)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(4)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(5)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(6)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(7)** Last row, first column....1000S162-97 should be 1200S162-97

**TABLE 804.3.1(8)** Last row, first column....1000S162-97 should be 1200S162-97

## Appendix H PATIO COVERS

**AH105.1 General**....shall be provided with exits conforming to the provisions of Section ~~R340~~ R311 of this code.

## INDEX

### JOINTS, PIPE

Slip.....~~P3003.3.7~~ P2704.1

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

**1<sup>st</sup> through 6<sup>th</sup> PRINTING (Posted: 11-29-2011)**

## **CHAPTER 3 BUILDING PLANNING**

Figure R301.2(5) corrections as follows:

1. At the center of the State of North Dakota, the ground snow load shown as 36 should read 35.
2. At the State of Pennsylvania, the elevation shown as 700 (2 places) should read 1700.

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

1<sup>st</sup> through 6<sup>th</sup> PRINTING (July 25, 2011)

## APPENDIX H PATIO COVER

**AH105.1 General**....shall be provided with exits conforming to the provisions of Section ~~R310~~ R311 of this code.

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

1<sup>st</sup> through 6<sup>th</sup> PRINTING (July 25, 2011)

## INDEX

### JOINTS, PIPE

Slip.....~~P3003.3.7~~ P2704.1

# 2006 International Residential Code Errata

FIRST PRINTING (Updated September 12, 2006)

## CHAPTER 1 ADMINISTRATION

### **~~R109.1.5.2 Reinforced masonry, insulating concrete form (ICF) and conventionally formed concrete wall inspection.~~**

~~Reinforced masonry walls, insulating concrete form (ICF) walls and conventionally formed concrete walls located in Seismic Design Categories D0, D1, D2 and E shall be inspected after the plumbing, mechanical and electric systems embedded within the walls, and reinforcing steel are in place and prior to the placement of grout or concrete. Inspection shall verify the correct size, location, spacing, and lapping of reinforcing. For masonry walls, inspection shall also verify that the location of grout cleanouts and size of grout spaces comply with the requirements of this code. (Posted 9-12-06)~~

# 2006 International Residential Code Errata

(Portions of text and tables not shown are affected by the errata)

1<sup>st</sup> through 4<sup>th</sup> PRINTING (June 24, 2011)

## Chapter 3 BUILDING PLANNING

**R314.5.4 Crawl spaces....**where crawl space access is required by Section R408.34 and where entry....

## CHAPTER 3 BUILDING PLANNING

### R301.2.1.2 Protection of openings. (No change to charging statement)

**Exception:** Wood structural panels with a minimum of 7/16 inch (11 mm) and a maximum span of 8 feet (2438 mm) shall be permitted for opening protection in one- and two-story buildings. Panels shall be pre-cut so that they shall be attached to the framing surrounding the opening containing the product with the glazed opening. Panels shall be secured with the attachment hardware provided. Attachments shall be designed to resist the component and cladding loads determined in accordance with ~~either Table R301.2(2) or Section 1609.6.5 of the International Building Code.~~

*(Remainder of exception unchanged, Posted 7-25-07)*

**R301.2.2.1.1 Alternate determination of seismic design category.** The Seismic Design Categories and corresponding Short Period Design Categories and corresponding Short Period Design Spectral Response Accelerations,  $S_{DS}$  shown in Figure R301.2(2) are based on soil Site Class D, as defined in ~~Section 1615.1.1~~ Section 1613.5.2 of the *International Building Code*. If soil conditions are other than Site class D, the Short Period Design Spectral Response Acceleration,  $S_{DS}$  for a site can be determined according to ~~Section 1615.1~~ Section 1613.5 of the *International Building Code*. The value of  $S_{DS}$  determined according to ~~Section 1615.1~~ Section 1613.5 of the *International Building Code* is permitted...

*(Remainder of section unchanged, posted 7-25-07)*

**Table R302.1 Exterior Walls**

Exterior Wall Element		Minimum Fire-resistance rating	Minimum Fire Separation Distance
Projections	(Fire-resistance rated)	1 hour on the underside	4 <del>2</del> feet
	(Not fire-resistance rated)	0 hours	5 feet

*(Remainder of the Table is unchanged, posted 9-12-06)*

**R314.3 Surface burning characteristics.** ... shall have a flame-spread index of not more than 75 and shall have a smoke-developed index of not more than 450 when tested in the maximum thickness of 4 inches, ~~provided the end use is approved in accordance with Section R314.6 using the thickness and density intended for use~~ intended for use in accordance with ASTM E84. Loose-fill type foam plastic insulation shall be tested as board stock for the flame spread index and smoke-developed index.

*(Exception unchanged, posted 9-12-06)*

**R314.7 Termite damage.** The use of foam plastics in areas of “very heavy” termite infestation probability shall be in accordance with ~~Section R320.4~~ R320.5.

*(Posted 7-25-07)*

### R324.1.7 Flood-resistant materials. (No change to charging statement and item #1)

- Materials and installation methods used for flooring and interior and exterior walls and wall coverings shall conform to the provisions of FEMA/FIA-TB-2.

*(Posted 7-25-07)*

**R324.2 Flood hazard areas (including A Zones).** ... All buildings and structures constructed in whole or in part in flood hazard areas shall be designed and constructed in accordance with Sections R324.2.1 ~~and~~ through R324.2.3.

*(Posted 7-25-07)*

**R324.3 Coastal high-hazard areas (including V Zones)** ... Buildings and structures constructed in whole or in part in coastal high-hazard areas shall be ~~designated~~ designed and constructed in accordance with Sections R324.3.1 through R324.3.6.

*(Posted 7-25-07)*



**CHAPTER 5  
FLOORS**

Table R503.2.1(1)

**ALLOWABLE SPANS AND LOADS FOR WOOD STRUCTURAL PANELS FOR ROOF AND SUBFLOOR  
SHEATHING AND COMBINATION SUBFLOOR UNDERLAYMENT**

SPAN RATING	ALLOWABLE LIVE LOAD		(Remainder of Table unchanged)
	SPAN @ 16" o.c.	SPAN @ 24" o.c.	
<b>40/20</b>	<b>305</b>	<b><del>30</del> 130</b>	

*(Posted 9-12-06)*

## CHAPTER 6

### WALL CONSTRUCTION

**Table R602.10.1**  
**WALL BRACING**

SEISMIC DESIGN CATEGORY OR WIND SPEED	CONDITION	TYPE OF BRACE	AMOUNT OF BRACING
Category C ( $S_S \leq 0.6g$ and $S_{ds} \leq 0.50g$ ) or less than 110 mph	One story Top of two or three story	Method 1, 2, 3, 4, 5, 6, 7 or 8	<p><del>Located in accordance with Section R602.10 and at least every 25 feet on center but not less than 30% of braced wall line for Method 3 or 45% of braced wall line for Methods 2, 4, 5, 6, 7 or 8.</del></p> <p>Located in accordance with Section R602.10 and at least every 25 feet on center but not less than 16% of braced wall line for Method 3 or 25% of braced wall line for Methods 2, 4, 5, 6, 7 or 8.</p>
	First story of two story Second story of three story	Method 2, 3, 4, 5, 6, 7 or 8	<p><del>Located in accordance with Section R602.10 and at least every 25 feet on center but not less than 16% of braced wall line for Method 3 or 25% of braced wall line for Methods 2, 4, 5, 6, 7 or 8.</del></p> <p>Located in accordance with Section R602.10 and at least every 25 feet on center but not less than 30% of braced wall line for Method 3 or 45% of braced wall line for Methods 2, 4, 5, 6, 7 or 8.</p>

*(Remainder of the Table is unchanged, posted 9-12-06)*

## CHAPTER 9 ROOF ASSEMBLIES

**R905.4.3 Underlayment.** Underlayment shall comply with ASTM D 226, Type I or ASTM D 4869, Type I or II.

**R905.5.3 Underlayment.** Underlayment shall comply with ASTM D 226, Type I or ASTM D 4869, Type I or II.

**R905.6.3 Underlayment.** Underlayment shall comply with ASTM D 226, Type I or ASTM D 4869, Type I or II.

**R905.7.3 Underlayment.** Underlayment shall comply with ASTM D 226, Type I or ASTM D 4869, Type I or II.

**R905.8.3 Underlayment.** Underlayment shall comply with ASTM D 226, Type I or ASTM D 4869, Type I or II.

*(Posted 9-12-06)*

# 2006 International Residential Code – Chapter 24 Errata

Note that these errata are based on the first printing of the code and may have been corrected in later printings.

## CHAPTER 24

- 1) In Table G2453.1, the last entry in the 6 foot chimney height row (first entry in 64 sq. inch column) should read 80,000 instead of 8,000.
- 2) The metric conversions in Sections G2428.3.4 and G2428.3.5 should be (18mm per mm) instead of (457mm per mm).
- 3) Add the following sentence to the end of the exception to Section G2420.5; "Piping from the shutoff valve to within 3 feet (914mm) of the appliance connection shall be sized in accordance with Section G2413."
- 4) Add the following sentence to the end of Section G2439.5.1; "The maximum length of the exhaust duct does not include the transition duct."
- 5) Section G2427.7.12 should reference Section G2427.6.10 instead of G2427.6.11.
- 6) Delete Section G2427.6.3 and renumber subsequent sections G2427.6.4 through G2427.6.11 and Figure G2427.6.4 accordingly.
- 7) Section G2427.10.2 should reference Sections G2427.10.2.1 through G2427.10.4.
- 8) Delete the exception in Sections G2428.2.9 and G2428.3.16.
- 9) Delete the definition of "CONNECTOR" in Section G2403.
- 10) Section G2451.2 should read; "Infrared radiant heaters shall be fixed in a position independent of gas and electric supply lines. Hangers and brackets shall be of noncombustible material."

*(Posted: January 3, 2008)*

## CHAPTER 43 REFERENCED STANDARDS

### AWPA

American Wood-Preservers' Association  
P.O. Box 5690  
Granbury, Texas 76049

Standard Reference Number	Title	Referenced in code section number
---------------------------------	-------	---

<u>C1-00</u>	<u>All Timber Products – Preservative Treatment by Pressure Processes . . . . .</u>	<u>R902.2</u>
--------------	---	---------------

*(Remainder of the Section is unchanged, posted 9-12-06)*