## Errata for 2006 Uniform Plumbing Code – 8th Printing


The following is a list of changes that we found after the eighth printing of the 2006 Uniform Plumbing Code. These changes may or may not apply to your code book. However, we do encourage you to check your code book with this list to ensure that all the changes are updated. Thank you.


Appendix A


Charts A-4 through A-7:	The X and Y values for Charts A-4 through A-7 were revised to reflect the correct conversion formula.
Chapter 5	
Section 510.2.5	The reference to Section 510.8(3) has been changed to correctly refer to Section 510.8.3
Chapter 6	
Table 6-3	In the fixtures column, the conversion for $\frac{3}{4}$ inch has been revised to read 19 mm.


06/25/08


## RECOMMENDED RULES FOR SIZING THE WATER SUPPLY SYSTEM

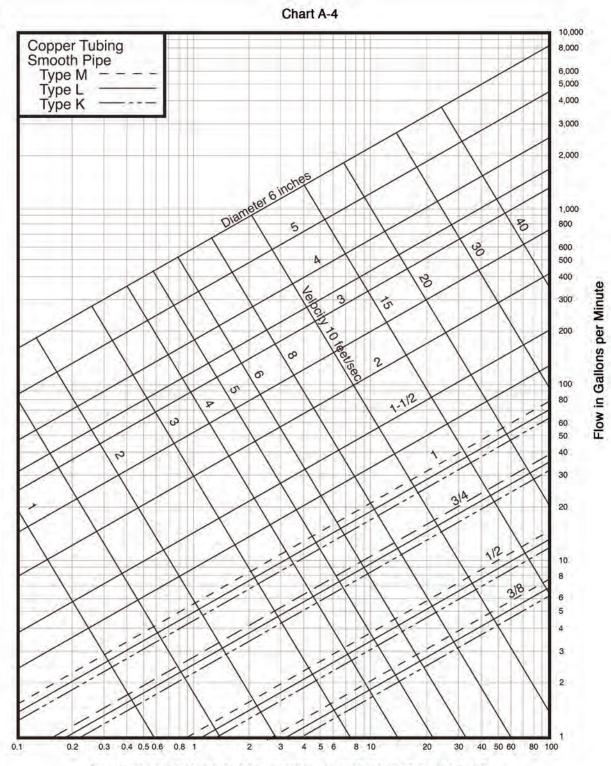




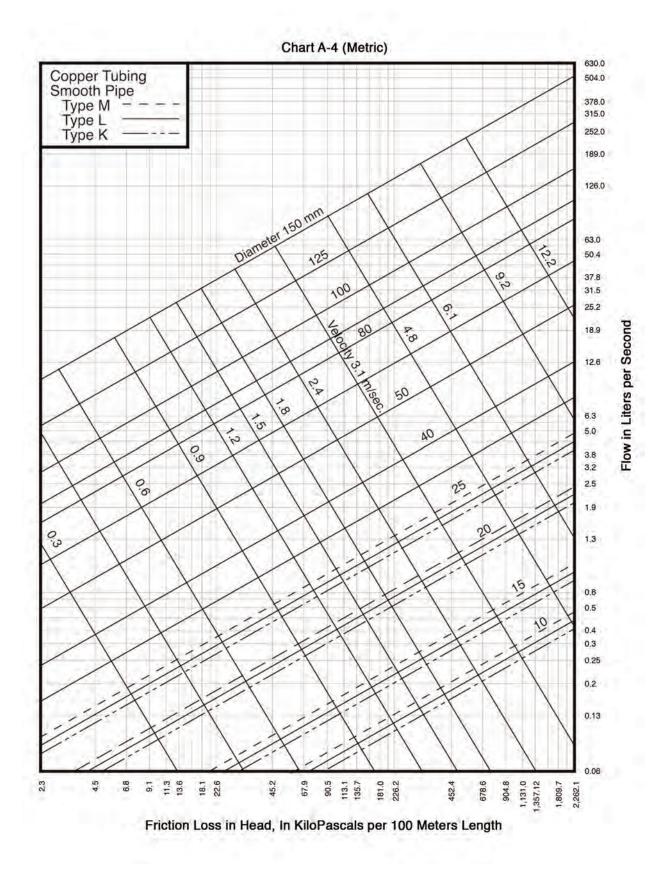


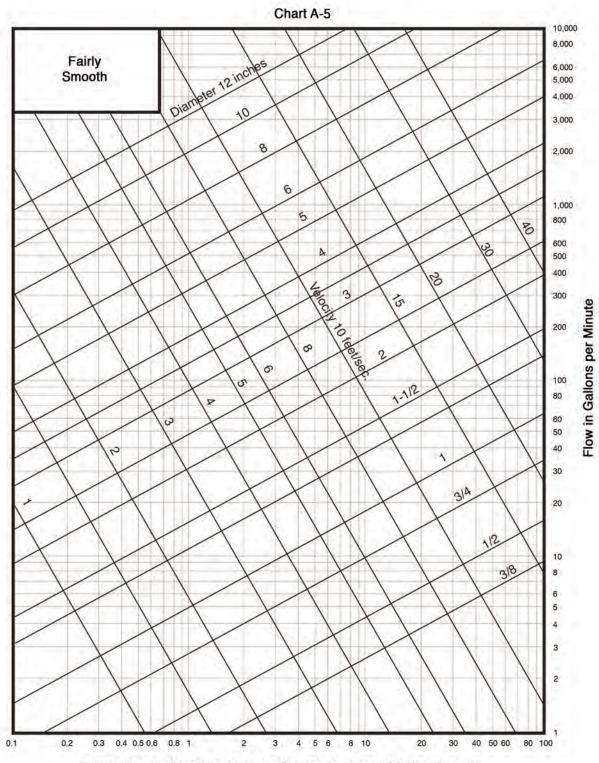




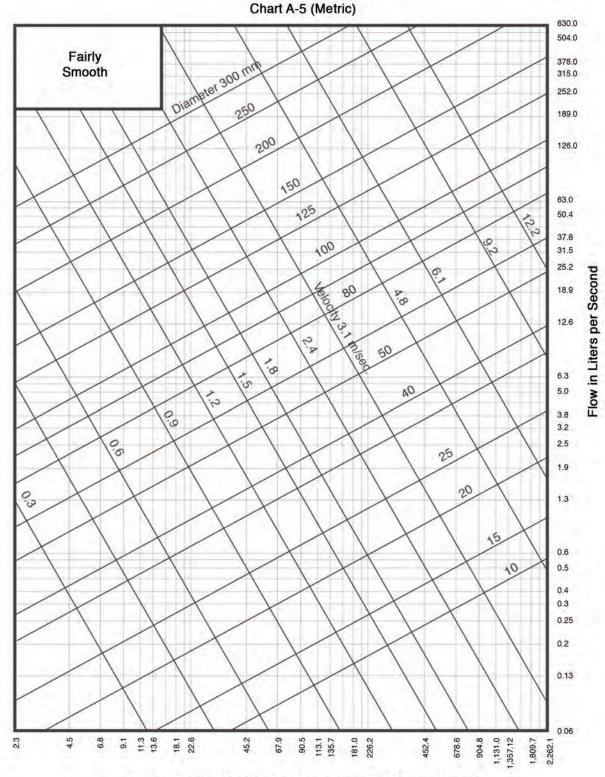


Friction Loss in Head, In KiloPascals per 100 Meters Length

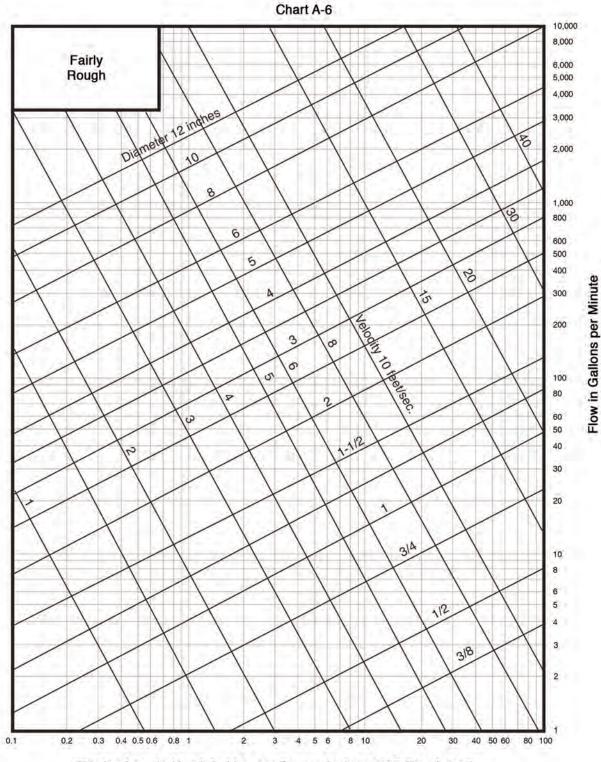



Friction Loss in Head, In Lbs. per Square-Inch per 100-Foot Length

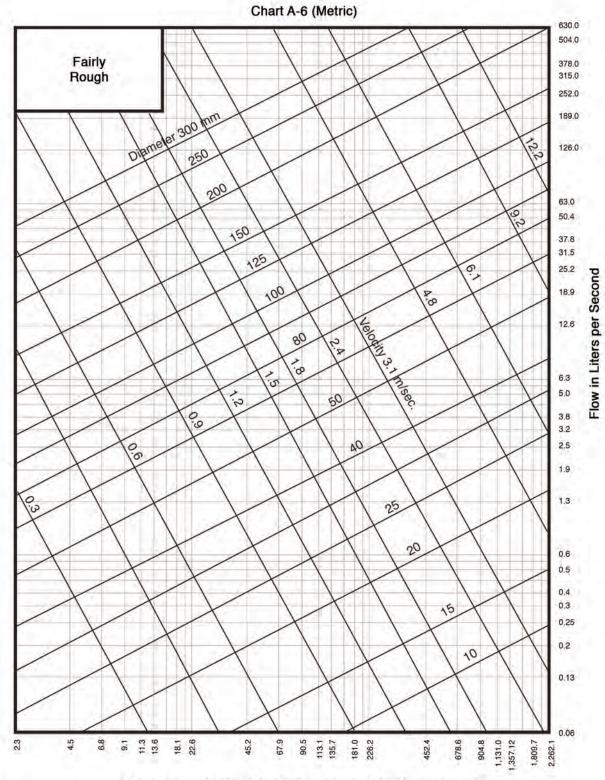

Friction Loss in Head, In KiloPascals per 100 Meters Length

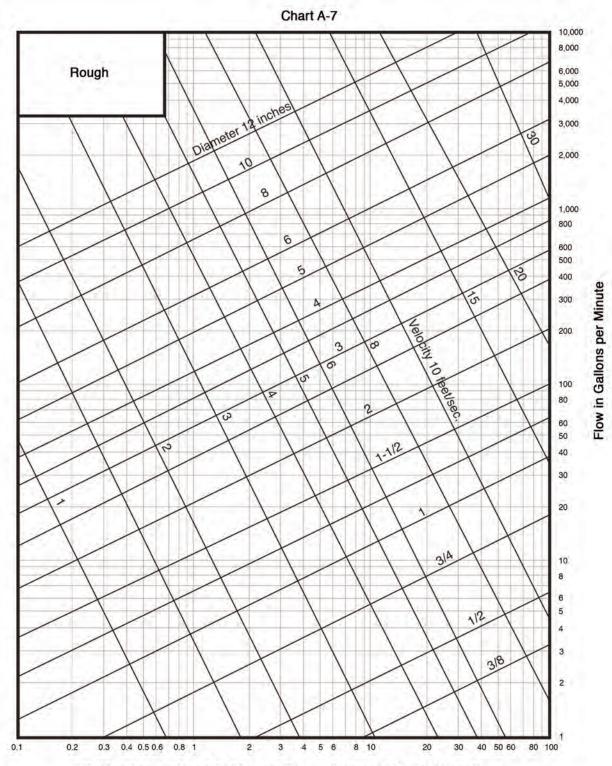



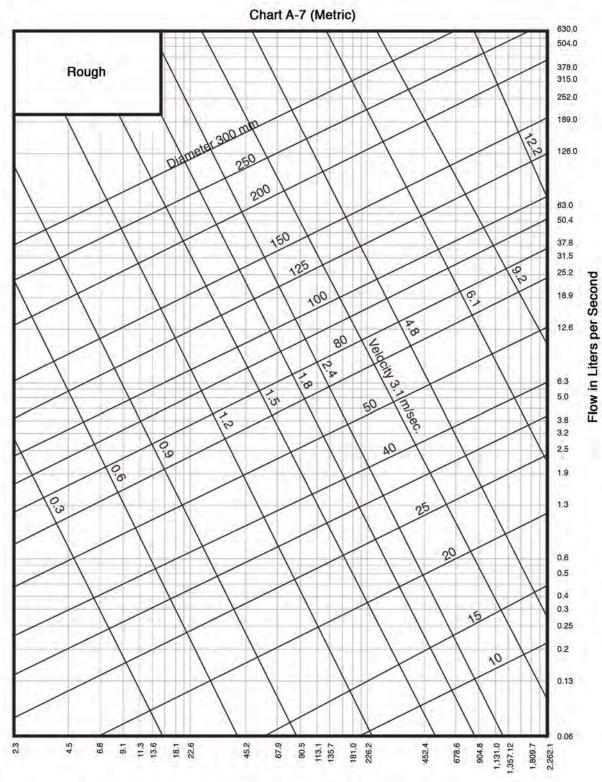

Friction Loss in Head, In KiloPascals per 100 Meters Length