

BLANK PAGE



Indian Standard SPECIFICATION FOR APPARATUS FOR AGGREGATE IMPACT VALUE

(Second Reprint MARCH 1996)

UDC 620.178.153.2.05:666.972.12

© Copyright 1980

BUREAU OF INDIAN STANDARDS MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG NEW DELHI 110002

Indian Standard

SPECIFICATION FOR APPARATUS FOR AGGREGATE IMPACT VALUE

Cement and Concrete Sectional Committee, BDC 2

Chairman

Representing

Dr H. C. VISVESVARAYA

Cement Research Institute of India, New Delhi

Mambers

ARDS (B&S) (Ministry of Railways), Lucknow DEPUTY DIRECTOR, STAND-ARDS (B&S) (Alternate) Hindustan Prefab Ltd, New Delhi SRRI K. C. AGGARWAL SHRI C. L. KASLIWAL (Alternate) SHRI K. P. BANERJEE Larsen & Toubro Ltd, Bombay SHRI HARISH N. MALANI (Alternate) National Test House, Calcutta Srri S. K. Banerjee Beas Designs Organization, Nangal Township SHRI R. N. BANSAL SHRI T. C. GARG (Alternate) Central Public Works Department, New Delhi CHIEF ENGINEER (DESIGNS) EXECUTIVE ENGINEER (DESIGNS) III (Alternate) Irrigation Department, Government of Punjab

Central Road

ADDITIONAL DIRECTOR, STAND- Research, Designs & Standards Organization

CHIEF ENGINEER (PROJECTS) DIRECTOR, IPRI (Alternate) DIRECTOR (CSMRS)

DEPUTY DIRECTOR

(CSMRS) (Alternate) DR R. K. GHOSH

DR R. K. GHOSH

New Delhi SHRIY, R. PHULL (Alternate I) SHRI M. DINAKARAN (Alternate II)

Indian Roads Congress, New Delhi

Central Water Commission, New Delhi

Research

(Continued on page 2)

(CSIR),

Institute

© Copyright 1980

BUREAU OF INDIAN STANDARDS

This publication is protected under the Indian Copyright Act (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

IS: 9377 - 1979

(Continued from page 1)

Members

SHRI B. R. GOVIND SHRI P. C. JAIN (Alternate)

SHRI A. K. GUPTA

DR R. R. HATTIANGADI SHRI P. J. JAGUS (Alternate)

DR IQBAL ALI

SHRIS, R. KULKARNI

SHRIS. K. LAHA

SHRIB T. UNWALLA (Alternate) DR MOHAN RAI

DR S. S. REHSI (Alternate) SHRIK, K. NAMBIAR

DR M. RAMAIAH

DR N. S. BHAL (Alternate) SHRI G. RAMDAS

DR A. V. R. RAO

SHRI J. SEN GUPTA (Alternate) SHRI R. V. CHALAPATHI RAO

SHRI S. ROY (Alternate)

SHRI T. N. S. RAO

SHRI S. R. PINHEIRO (Alternate)

SHRI ARJUN RIJHSINGHANI

SHRI K. VITHAL RAO (Alternate)

SECRETARY DEPUTY SECRETARY (I) (Alternate)

SHRI N. SIVAGURU SHRI R. L. KAPOOR (Alternate)

SHRI K. A. SUBRAMANIAM

SHRI P. S. RAMACHANDRAN (Alternate :

SUPERINTENDING ENGINEER Public Works Department, Government of Tamil Nadu (DESIGNS)

EXECUTIVE ENGINEER

(SM & R DIVISION) (Alternate)

SHRI L. SWAROOP Dalmia Cement (Bharat) Ltd. New Delhi SHRI A. V. RAMANA (Alternate)

SHRI B. T. UNWALLA

The Concrete Association of India, Bombay SHRI Y. K. MEHTA (Alternate)

SHRI D. AJITHA SIMHA.

Director (Civ Engg)

Secretary

SHRI M. N. NEELAKANDHAN Assistant Director (Civ Engg), ISI

Representing

Engineer-in-Chief's Branch, Army Headquarters

Products Ltd. Asbestos Cement Hyderabad Hyderabad

The Associated Cement Companies Ltd, Bombay

Engineering Research Laboratories, Hyderabad M. N. Dastur & Co (Pvt) Ltd. Calcutta The Institution of Engineers (India), Calcutta

Central Building Research Institute (CSIR),

Roorkee In personal capacity ('Ramanalaya' 11 First Crescent

Park Road, Gandhinagar, Adyar, Madras) Structural Engineering Research Centre (CSIR), Roorkee

Directorate General of Supplies & Disposals, New Delhi

National Buildings Organization, New Delhi

Geological Survey of India, Calcutta

Gammon India Ltd. Bombay

Cement Corporation of India Ltd, New Delhi

Central Board of Irrigation and Power, New Delhi

Roads Wing, Ministry of Shipping and Transport

The India Cements Ltd, Madras

Director General, ISI (Ex-officio Member)

(Continued on page 7)

Indian Standard SPECIFICATION FOR APPARATUS FOR AGGREGATE IMPACT VALUE

O. FOREWORD

- **0.1** This Indian Standard was adopted by the Indian Standards Institution on 20 December 1979, after the draft finalized by the Cement and Concrete Sectional Committee had been approved by the Civil Engineering Division Council.
- 0.2 The Indian Standards Institution has already published a series of standards on methods of testing cement and concrete. It has been recognized that reliable and intercomparable test results could be obtained only with standard testing equipment capable of giving the desired level of accuracy. The Sectional Committee has therefore proposed to bring out a series of specifications covering the requirements of equipment used for testing cement and concrete, to encourage their development and manufacture in the country.
- 0.3 This standard specifies the requirements for the apparatus used for determining the aggregate impact value of coarse aggregate. The aggregate impact value gives a relative measure of the resistance of an aggregate to sudden shock or impact, which in some aggregates differs from its resistance to a slow compressive load. The method of determining aggregate impact value has been covered in IS: 2386 (Part IV)-1963*.
- **0.4** In the formulation of this standard, due weightage has been given to international co-ordination among the standards and practices prevailing in different countries in addition to relating it to the practices in the field in this country.
- 0.5 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS: 2-1960†. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

^{*}Methods of test for aggregates for concrete: Part IV Mechanical properties.

[†]Rules for rounding off numerical values (revised).

IS: 9377 - 1979

1. SCOPE

1.1 This standard covers the requirements of apparatus for determining the impact value of coarse aggregates.

2. APPARATUS

2.1 The apparatus shall consist of an impact testing machine and other accessories (see 3 and 4).

3. IMPACT TESTING MACHINE

3.1 The general form and salient dimensions of machine shall be as described in Fig. 1 and 3.2 to 3.2.2.

Note — A stroke counter of suitable design may be provided to automatically record the number of blows.

- 3.2 The total mass of the machine shall be between 45 to 60 kg. The machine shall have a cast iron base weighing between 20 to 30 kg with a plane lower surface of not less than 300 mm diameter, and supported on a plane concrete block of $600 \times 600 \times 450$ mm size. The machine shall be prevented from rocking by securing it firmly and evenly to the foundation. Three 10 mm diameter holes shall be provided in the base plate for this purpose. Alternatively the machine may be supported on a plane metal plate cast into the foundation.
- 3.2.1 Steel Cup A cylindrical mild steel cup of the following internal dimensions shall be provided at the centre of the base of the machine in a manner such that it can be easily and rigidly fastened to and removed from the base:

Diameter	$100 + \frac{0.25}{0}$ mm
Depth	$50 \pm 0.25 \text{ mm}$
Thickness	$7 \pm 1 \text{ mm}$

A chamfer of 2 to 3 mm shall be provided at the inner lip of the steel cup. The inner surface of the cup shall be case hardened and shall have a hardness of not less than 650 VH or equivalent.

3.2.2 Steel Hammer — A steel tup or hammer, the lower end of which shall be cylindrical in shape with 2 to 3 mm chamfer at the lower edge. The hammer shall slide freely between the vertical steel guides so arranged that cylindrical lower end of the hammer is above and concentric with steel cup. Arrangement shall be provided for lifting the hammer and allowing it to fall freely between the vertical guides for a height of 380 ± 5 mm on the test sample in the cup. It shall be possible to adjust height of fall within 5 mm. Arrangement shall also be provided for locking the hammer while fastening or removing the cup.

The release mechanism for hammer shall be quick release type giving reproducible height of drop between successive drops within \pm 0.5 mm. The mass of the hammer and other dimensions shall be as below:

Mass of hammer	13.75 ± 0.25 kg
Diameter of cylindrical lower end of hammer	98 + 0 mm
Length of the cylindrical lower end	$50 \pm 1 \text{ mm}$
Diameter of shank of	$75 \pm 1 \text{ mm}$

The lower surface of the hammer shall be case hardened and shall have a hardness not less than 650 VH or equivalent.

4. ACCESSORIES

4.1 Cylindrical Measures — A cylindrical steel measure tared to the nearest gram, of sufficient rigidity to retain its form under rough usage, and of the following dimensions:

Diameter	$75 \pm 1 \text{ mm}$
Depth	$50 \pm 1 \text{ mm}$
Shell thickness, Min	5 mm

4.2 Tamping Rod — A straight steel tamping rod of 10 mm diameter, 230 mm long and rounded at one end.

5. MARKING

- 5.1 The following information shall be clearly and indelibly marked on each component of the apparatus in a way that it does not interfere with the performance of the apparatus:
 - a) Name of the manufacturer or his registered trade-mark or both,
 - b) Date of manufacture.
- 5.1.1 The apparatus may also be marked with the ISI Certification Mark.

Note — The use of the ISI Certification Mark is governed by the provisions of the Indian Standards Institution (Certification Marks) Act and the Rules and Regulations made thereunder. The ISI Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well-defined system, of inspection, testing and quality control which is devised and supervised by ISI and operated by the producer. ISI marked products are also continuously checked by ISI for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the ISI Certification Mark may be granted to manufacturers or processors, may be obtained from the Indian Standards Institution.

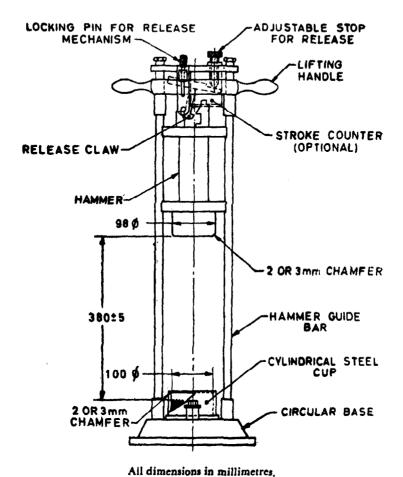


FIG. 1 AGGREGATE IMPACT TEST MACHINE

Instrument Manufacturers (India)

(Continued from page 2)

SHRI H. C. VERMA

SHRI A. V. SHASTRI (Alternate)

Instruments for Cement and Concrete Testing Subcommittee, BDC 2:10

Convener Representing Engineering Research Laboratories, Hyderabad DR TORAL ALI Members PROF B. M. AHUJA Indian Institute of Technology, New Delhi SHRI T. P. ERAMBARAM Highways Research Station, Madras DR R. K. GHOSH Central Road Research Institute (CSIR), New Delhi SHRI K. L. SETHI (Alternate) SHRIH, K. GUHA All India Instruments Manufacturers and Dealers Association, Bombay SHRI V. K. VASUDEVAN (Alternate) The Associated Cement Companies Ltd. Bombay SHRIP. J. JAGUS SHRI D. A. WADIA (Alternate) Research & Development Organization (Ministry SHRI M. R. JOSHI of Defence), Pune SRRI Y. P. PATHAK (Alternate) National Test House, Calcutta SHRIE, K. RAMACHANDRAN PROF C. K. RAMESH Indian Institute of Technology, Bombay DR R. S. AYYAR (Alternate) SHRI M. V. RANGA RAO Cement Research Institute of India, New Delhi DR K. C. NARANG (Alternate) Central Building Research Institute (CSIR), Dr. S. S. REHSI Roorkee SHRI J. P. KAUSHISH (Alternate) Public Works Department, Government of Uttar SHRI M. M. D. SETH Pradesh SHRI I. P. BHATNAGAR (Alternate)

Associated

Private Ltd, New Delhi

BUREAU OF INDIAN STANDARDS

Manak Phayan Q Pahadur Chah Zafar Mara NEW DEL HI 110002

Headqua	rters:
---------	--------

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELH	1 1 10002
	Manaksanstha to all Offices)
Regional Offices:	Telephone
Central: Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002	(331 01 31)331 13 75
*Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola, CALCUTTA 700054	36 24 99
Northern: SCO 445-446, Sector 35-C, CHANDIGARH 160036	2 18 43 3 16 41
Southern: C. I. T. Campus, MADRAS 600113	41 24 42 41 25 19 41 29 16
†Western: Manakalaya, E9 MIDC, Marol, Andheri (East BOMBAY 400093	
Branch Offices:	
'Pushpak', Nurmohamed Shaikh Marg, Khanpur.	(2 63 48
AHMADABAD 380001	2 63 49
‡Peenya Industrial Area 1st Stage, Bangalore Tumkur Ro BANGALORE 560058	ad (38 49 55
	38 49 56
Gangotri Complex, 5th Floor, Bhadbhada Road, T. T. Nag BHOPAL 462003	ar, 6 67 16
Plot No. 82/83, Lewis Road, BHUBANESHWAR 751002	5 36 2 7
53/5, Ward No. 29, R.G. Barua Road, 5th Byelane, GUWAHATI 781003	3 31 77
5-8-56C L, N. Gupta Marg (Nampally Station Road), HYDERABAD 500001	23 10 83
R14 Yudhister Marg, C Scheme, JAIPUR 302005	{ 6 34 71 6 98 32
44 T/440 D. Carradova Namer, KANDIJD 20000E	21 68 76
117/418 B Sarvodaya Nagar, KANPUR 208005	21 82 92
Patliputra Industrial Estate, PATNA 800013	6 23 05
T.C. No. 14/1421. University P.O., Palayam TRIVANDRUM 695035	{6 21 04 {6 21 17
Inspection Offices (With Sale Point):	-
Pushpanjali, First Floor, 205-A West High Court Road, Shankar Nagar Square, NAGPUR 440010	2 51 71
Institution of Engineers (India) Building, 1332 Shivaji Na PUNE 411005	gar, 5 24 35
*Sales Office in Calcutta is at 5 Chowringhee Approach, P. O. P. Street, Calcutta 700072	rincep 27 68 00

Sales Office in Bombay is at Novelty Chambers, Grant Road, 89 65 28 Bombay 400007

[‡]Sales Office in Bangalore is at Unity Building, Narasimharaja Square, 22 36 71 Bangalore 560002